

UHD-201MV

4K 2x1 HDMI Switch With Multiview



The **UHD-201MV** HDMI Switch with Multiview connects 2 media sources to one display, viewing them simultaneously or switching between them. HDMI 2.0 and HDCP 2.2 compliant, it supports 4K@60Hz and 18Gbps bandwidth. Features include 3 Multiview modes, seamless switching, and Optical and Analog RCA audio outputs. Control via remote, front buttons, or RS-232 commands. Ideal for home and commercial setups.

DIMENSIONS & WEIGHT:

Length: 175mm/6.89in **Width:** 100mm/3.94in
Height: 30mm/1.18in **Weight:** 497g/17.53oz

PACKAGE CONTENTS: 1x UHD-201MV, 1x IR Remote Control, 1x 3pin Phoenix Connector, 2x Mounting Ears, 4x Machine screws, 1x IR Receiver cable 1x Power Adapter, User Manual

KEY FEATURES:

- HDMI 2.0b & HDCP 2.2 compliant
- Video bandwidth 18Gbps
- Video resolutions up to 4K@60Hz
- Seamless switching
- Up to 4 display modes: SINGLE, Picture in picture, Picture by picture (1), Picture by picture (2)
- Audio extraction via Analog RCA and Optical port
- Control via buttons on the front, remote or RS-232 commands
- Compact design and easy installation

SPECIFICATIONS

CONNECTIVITY:

INPUT:	2 × HDMI [Type A, 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female]
	1 × L/R [3.5mm Stereo Mini-jack]
	1 × Optical [S/PDIF]
CONTROL:	1 × IR Exender [3.5mm Stereo Mini-jack]
	1 x RS-232 [3pin-phoenix connector]

COMPLIANCES:

HDMI Compliance	: HDMI 2.0b
HDCP Compliance	: HDCP 2.2

SUPPORTED HDMI CABLES:

HDMI 2.0/2.1	: We recommend using high quality HDMI 2.0/2.1 cables under 30 feet for optimum performance
--------------	---

EXTENDING DISTANCE:

4K@60Hz	: 25 Feet
---------	-----------

VIDEO OUTPUT:

Video Bandwidth	: 18 Gbps
Video Resolutions	: Up to 4K@60Hz 4:4:4

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: Yes
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: Yes

AUDIO SUPPORT:

HDMI Audio Formats	: PCM2.0/5.1/7.1CH, Dolby Digital/Plus, DTS, DTS High Res
Optical Audio Formats	: Dolby Digital, DTS 5.1, PCM2.0.
Analog audio formats	: PCM2.0




POWER:

Power Consumption	: 4.56W (Max)
Power Supply:	Input: AC 100-240V 50/60Hz
	Output : DC 12V/1A





CONNECTION DIAGRAM

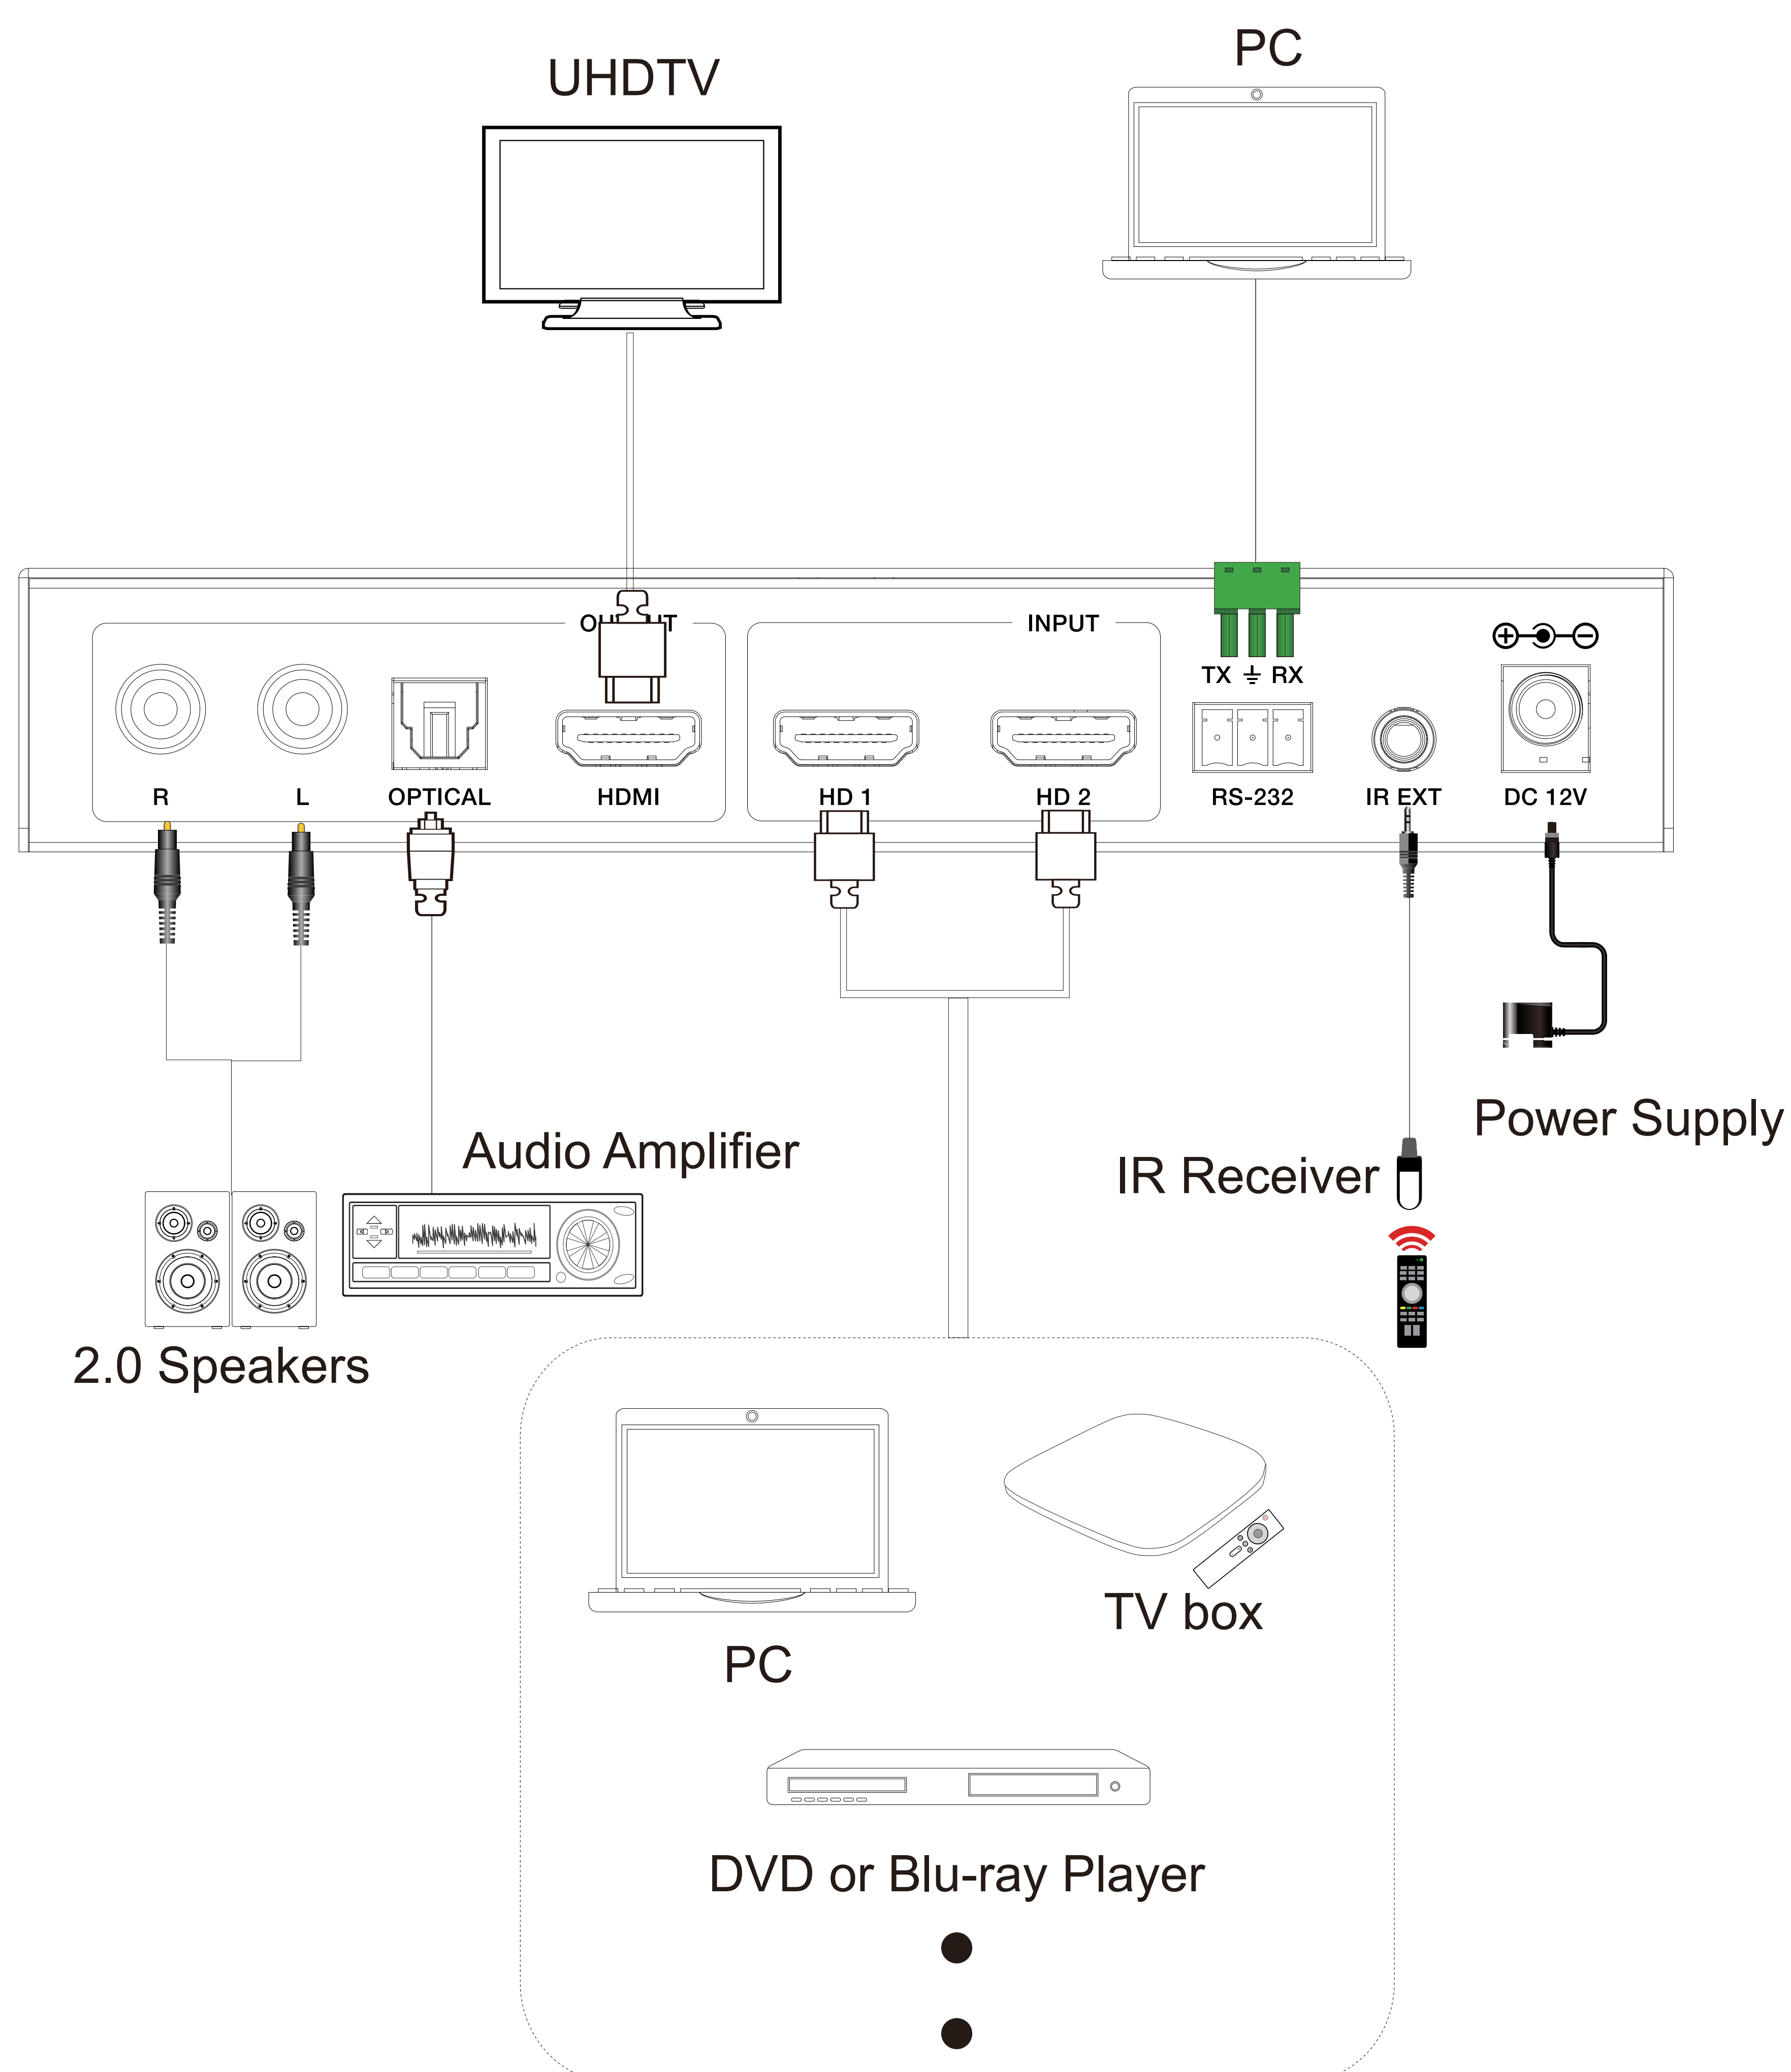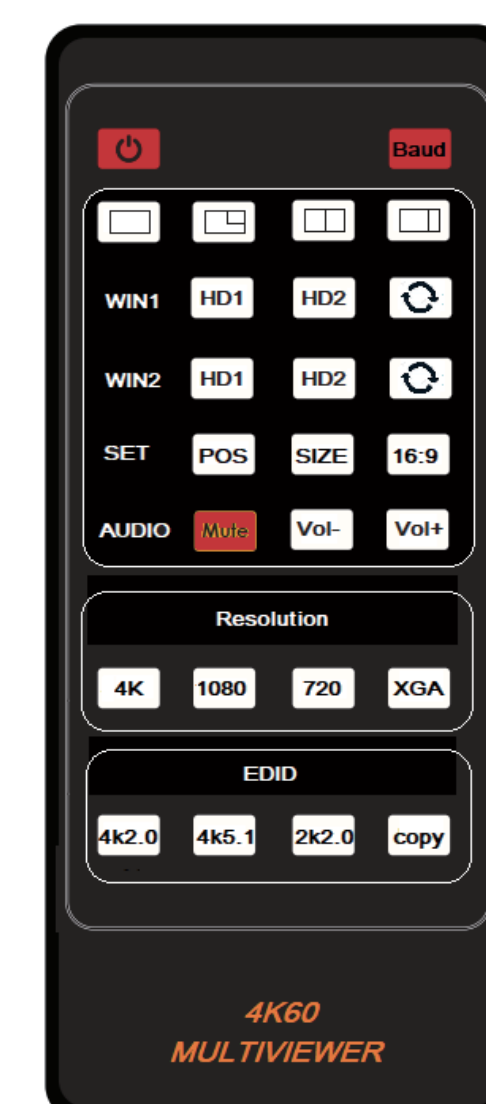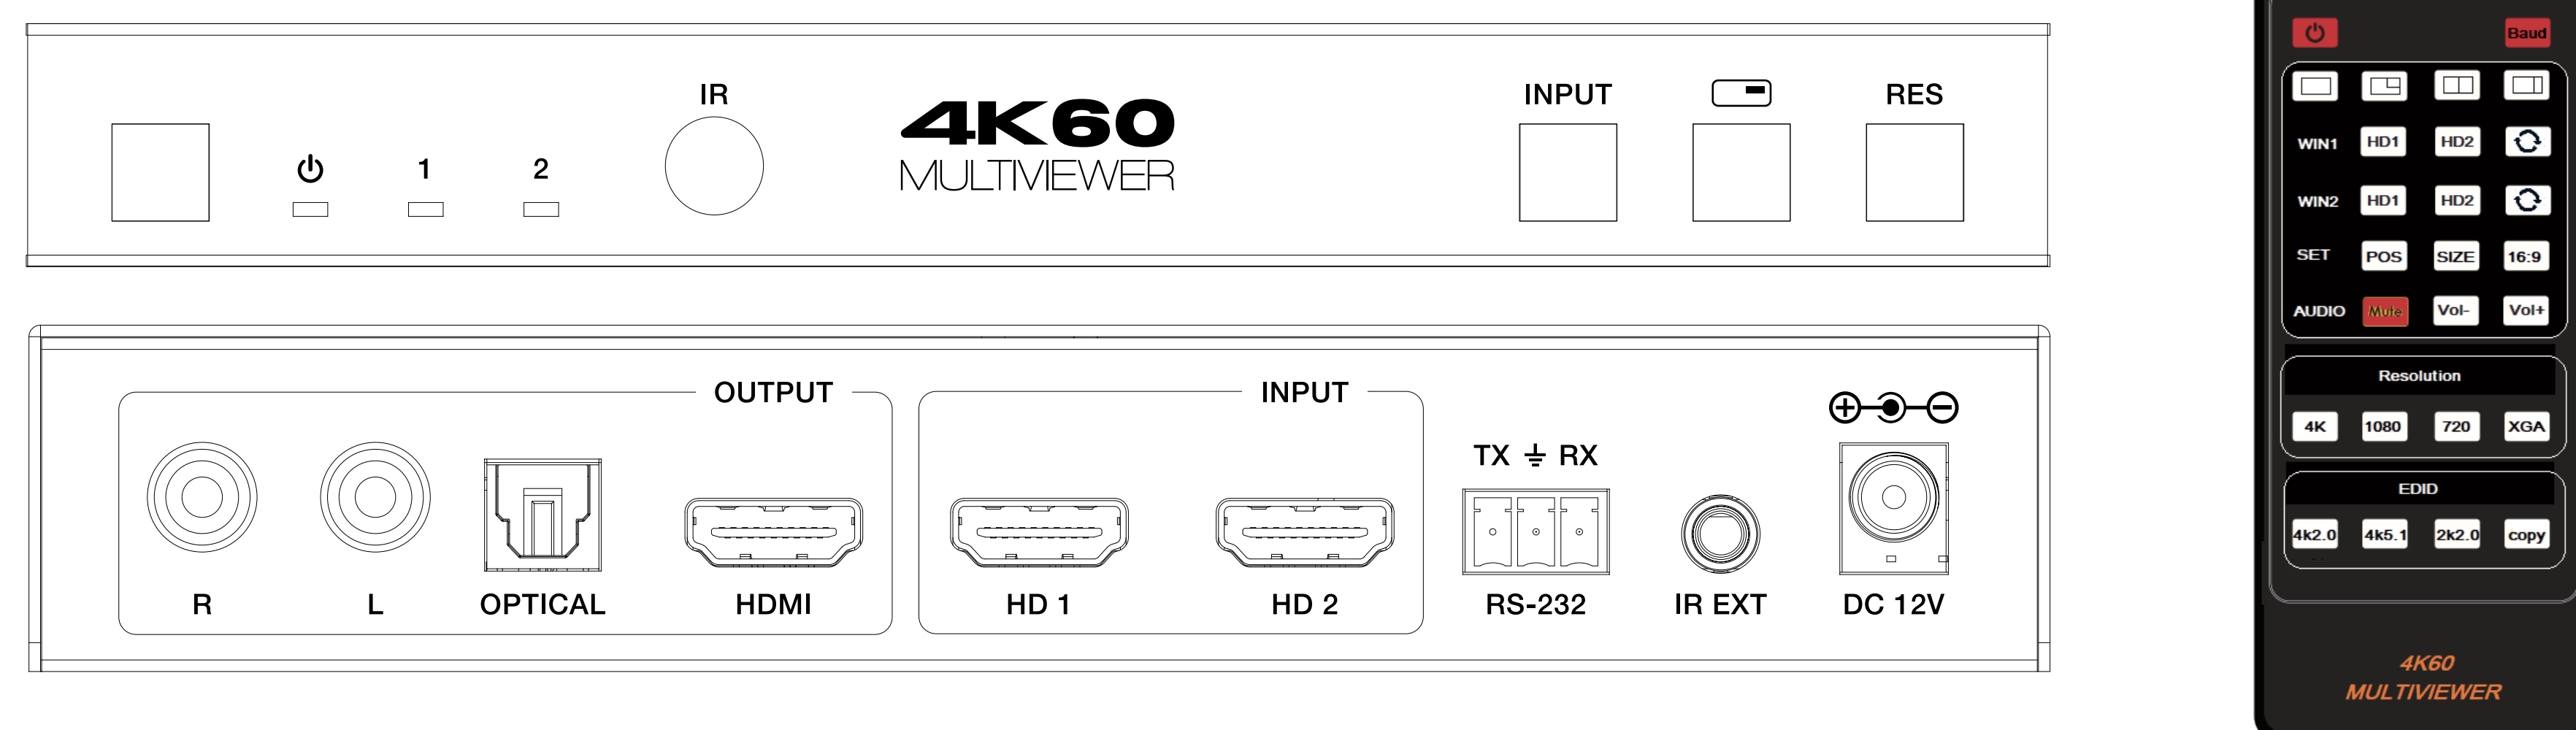

OVER 10 YEARS
EXPERIENCE

