

Datasheet

CUBEPOWER - 1-Relay Receiver with Remote Programming

Product Description

The CUBEPOWER is a stand-alone receiver compatible with the full range of ERONE and RADIUM remotes. The first remote registered dictates the transmitter range to be used. If the first remote enrolled is a RADIUM transmitter, then the RXCUBE will only work with RADIUM. The same is true for ERONE.

The receiver is programmed and controlled remotely via the InstallerCUBE app available on iOS and Android. Another app is also available for end users specifically, allowing them direct access (UserCUBE).

These 433 MHz radio frequency systems offer longer range (up to 820 ft (250m)), less barred signals and excellent reliability.



Key Features

- Mobile programmable receiver
- Compatible with RADIUM and ERONE remotes
- Android and IOS app for programmer and user
- Up to 250 transmitters, 100 user phone codes
- 1 relay (NC/NO)
- Keeloq® Hopping Code



Certification



DEEE



Certification




IP2X



-4°F to 149°F
(-20°C to 65°C)

Product Specifications

Material:	ABS
Technology:	Radio & bluetooth
Type:	Superheterodyne
Frequency:	433.92 MHz
Modulation:	AM/ASK
Encoding:	Keeloq® Hopping code
Code combinations:	2 ⁶⁴
Relays:	1
Contacts:	C, NO, NC
Delay:	1 sec to 23h59m59s
Operating mode:	Pulse, latch, delayed
Memory	up to 250 transmitters up to 100 smartphone user codes
Weight:	0.1 lb, 0.047 kg

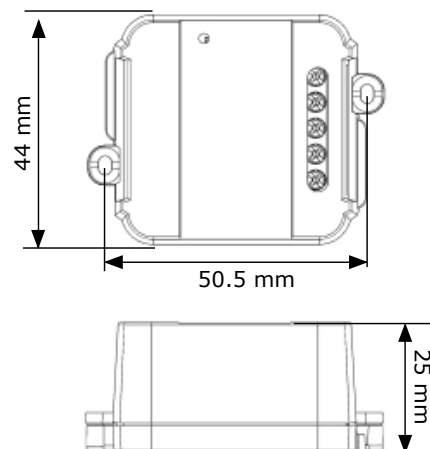

Electrical Specifications

Power supply:	12-24V AC/DC (auto-detect)
Max power on output:	10A @ 30V DC - NO 6A @ 30V DC - NC
Consumption:	120 mA @12V AC (500 mA at power up)

Start configuring your receiver today!




**Download
InstallerCUBE**




**Download
UserCUBE**

Accessories



RS1

1-button thin remote



CMC10

10 mobile credentials license
for CUBE X