




Description

The **EL1500C** is another component of the NITEK cutting edge **EtherStretch** line. Our **Etherstretch** solution allows for the utilization of existing cable infrastructure (coax or UTP) to transmit data from IP cameras and other network devices along with PoE power to operate these network devices over the wire for distances up to 500 meters or 1600 feet.

The **EL1500C** is a system containing a transmitter and a receiver unit that requires very little installation time and absolutely no set up or configuration. The system can quickly turn any ordinary RG59 coax cable into a high speed network communication and PoE path for distances up to 500 meters or 1600 feet.

The **EL1500C** is transparent to the network thus requiring no IP and MAC addressing. Simply connect your network devices to the networking ports of the transmitter and receiver along with existing cabling and the system begins communicating. LED indicators show the status and speed of network communications and PoE power.


NITEK **EtherStretch EL1500C** extends network communications to overcome cable distance limitations offering connections to devices in locations traditional networking does not allow. The **EL1500C** is ideal for retrofitting existing installations. The units are constructed of industrial grade RoHS compliant plated aluminum with a corrosion resistant finish making them very durable.

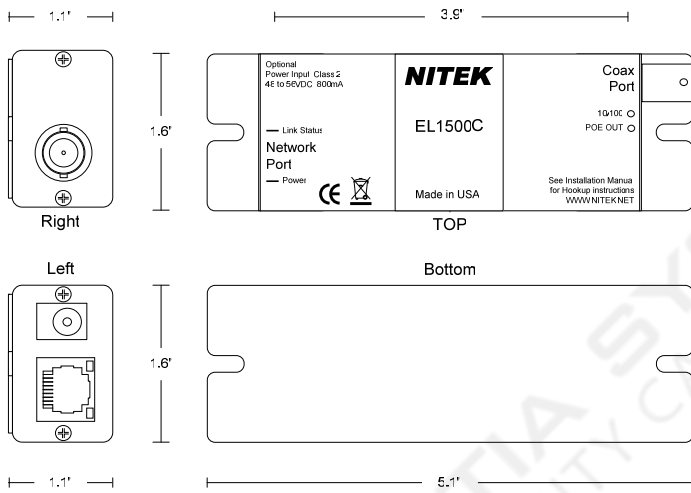

Features

- Transmits up to distances of 500 meters (1600 feet)
- Supports mega-pixel technology
- Fully transparent to the network
- Supports any network device, including IP cameras
- Supports 10/100 and PoE over RG59 cables
- Easy to install, no set up required
- No MAC or IP addressing required
- LED indicators for network signals, link status and power
- Optional power supply can insert PoE power for non-PoE switches
- Surge protected inputs
- Ground loop isolation

Available PoE Wattage At PoE Device

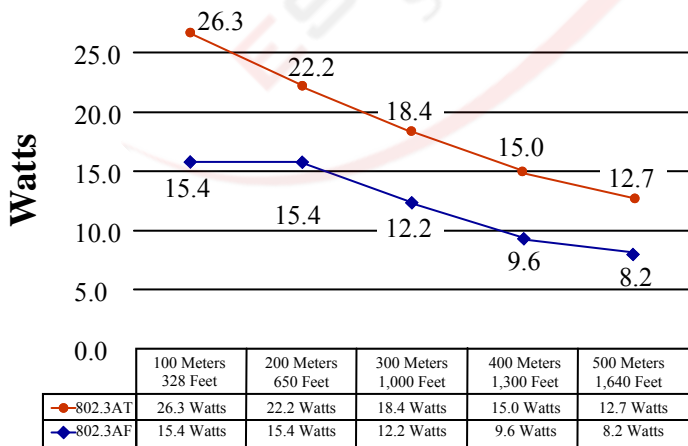

* Results charted were calculated using RG59U coaxial cable with a 20AWG center conductor and power sourcing equipment using IEEE 802.3AF standard with starting voltage of 48 volts DC and IEEE 802.3AT standard with starting voltage of 54 volts DC



USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

EUROPE

De Schans 19-21 2a
8231 KA Lelystad
Tel: +31(0)320-230005
Fax: +31(0)320-282186
E-mail: info@nitek.nl
WWW.NITEK.NL

TECHNICAL SPECIFICATION

Network Transmission Device

Network Port	RJ45 Connector
Link Port	BNC Coax Jack
Ethernet	100BASE-TX Full Duplex
Dimensions	1.1" x 1.6" x 5.1" including tabs & BNC
Operating Temperature	-15° to 75° C / 0° to 167° F
Shipping Weight	2 lbs

Common Installation Types

