



HD12-EX132-K

1x 2 HD Extender Splitter Up To 132 Feet

The **HD12-EX132-K** is a robust HDMI extender splitter that transmits a single HDMI signal to two distant displays up to 132 feet via a single CAT6/7 cable. Supporting video resolutions up to 1080p@60hz, HDMI 1.4, HDCP 1.4, and a 10.2Gbps bandwidth, it's ideal for various setups. It accommodates advanced audio formats and features an HDMI loop-out and unidirectional IR control. With PoC technology, it requires only one power source, ensuring a streamlined, plug-and-play experience for both residential and commercial applications.

PACKAGE CONTENTS: 1x Transmitter, 2x Receiver, 1x IR Blaster cable, 2x IR Receiver cable, 2x DC5V/1A Power Adapter, 1x DC5V/2A Power Adapter, User Manual

DIMENSIONS & WEIGHT:

Transmitter:

Length: 157.8mm/6.21in **Width:** 62mm/2.244in
Height: 21.6mm/0.85in **Weight:** 380g/13.40oz

Receiver:

Length: 71.6mm/2.82in **Width:** 66.6mm/2.62in
Height: 22.6mm/0.87in **Weight:** 80g/2.82oz

KEY FEATURES:

- HDMI 1.3 and HDCP 1.2 compliant
- Video resolution up to 1080P@60Hz
- Extending distance up to 130 feet at the resolution of 1080P@60Hz
- Connectivity;
Transmitter: 1 HDMI IN, 1 HDMI OUT, 1 IR out & 2 CAT OUT ports
Receiver: 1 CAT IN, 1 IR IN & 1 HDMI OUT
- Advanced EDID management
- Compact design for easy and flexible installation

SPECIFICATIONS

CONNECTIVITY:

Transmitter:

INPUT:	1 × HDMI [Type A, 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female] 2 x CAT [RJ45, 8-pin female]
CONTROL:	1 × IR OUT [3.5mm Stereo Mini-jack] 1 x EDID DIP switch [3-pin]

Receiver:

INPUT:	1 x CAT [RJ45, 8-pin female]
OUTPUT:	1 × HDMI [Type A , 19-pin female]
CONTROL:	1 x IR IN [3.5mm Stereo Mini-jack]

COMPLIANCES:

HDMI Compliance	: HDMI 1.3
HDCP Compliance	: HDCP 1.2

SUPPORTED CAT CABLES:

CAT5e, CAT6, CAT7	: We recommend you to use shielded CAT6 cables & High-Quality HDMI Cables for optimum performance
-------------------	---

EXTENDING DISTANCE:

1080P@60Hz:	: 132 Feet
-------------	------------

RJ-45 CONNECTOR TYPE

Standard RJ-45 8-pin Female

VIDEO OUTPUT:

Video Bandwidth	: 10.2Gbps
Video Resolutions	: Up to 1080P@60Hz

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: Yes
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

LOOP-OUT/LOCAL PORT:

Has loop out port	: Yes
Number of Loop out ports	: 1

AUDIO SUPPORT:

HDMI Audio Formats:	: LPCM 7.1CH, Dolby True HD, and DTS -HD Master Audio
---------------------	--




POWER:

Power Consumption	: 10W (Max)
Power Supply:	Input : AC 100-240V 50/60Hz Output : DC 5V/2A





CONNECTION DIAGRAM

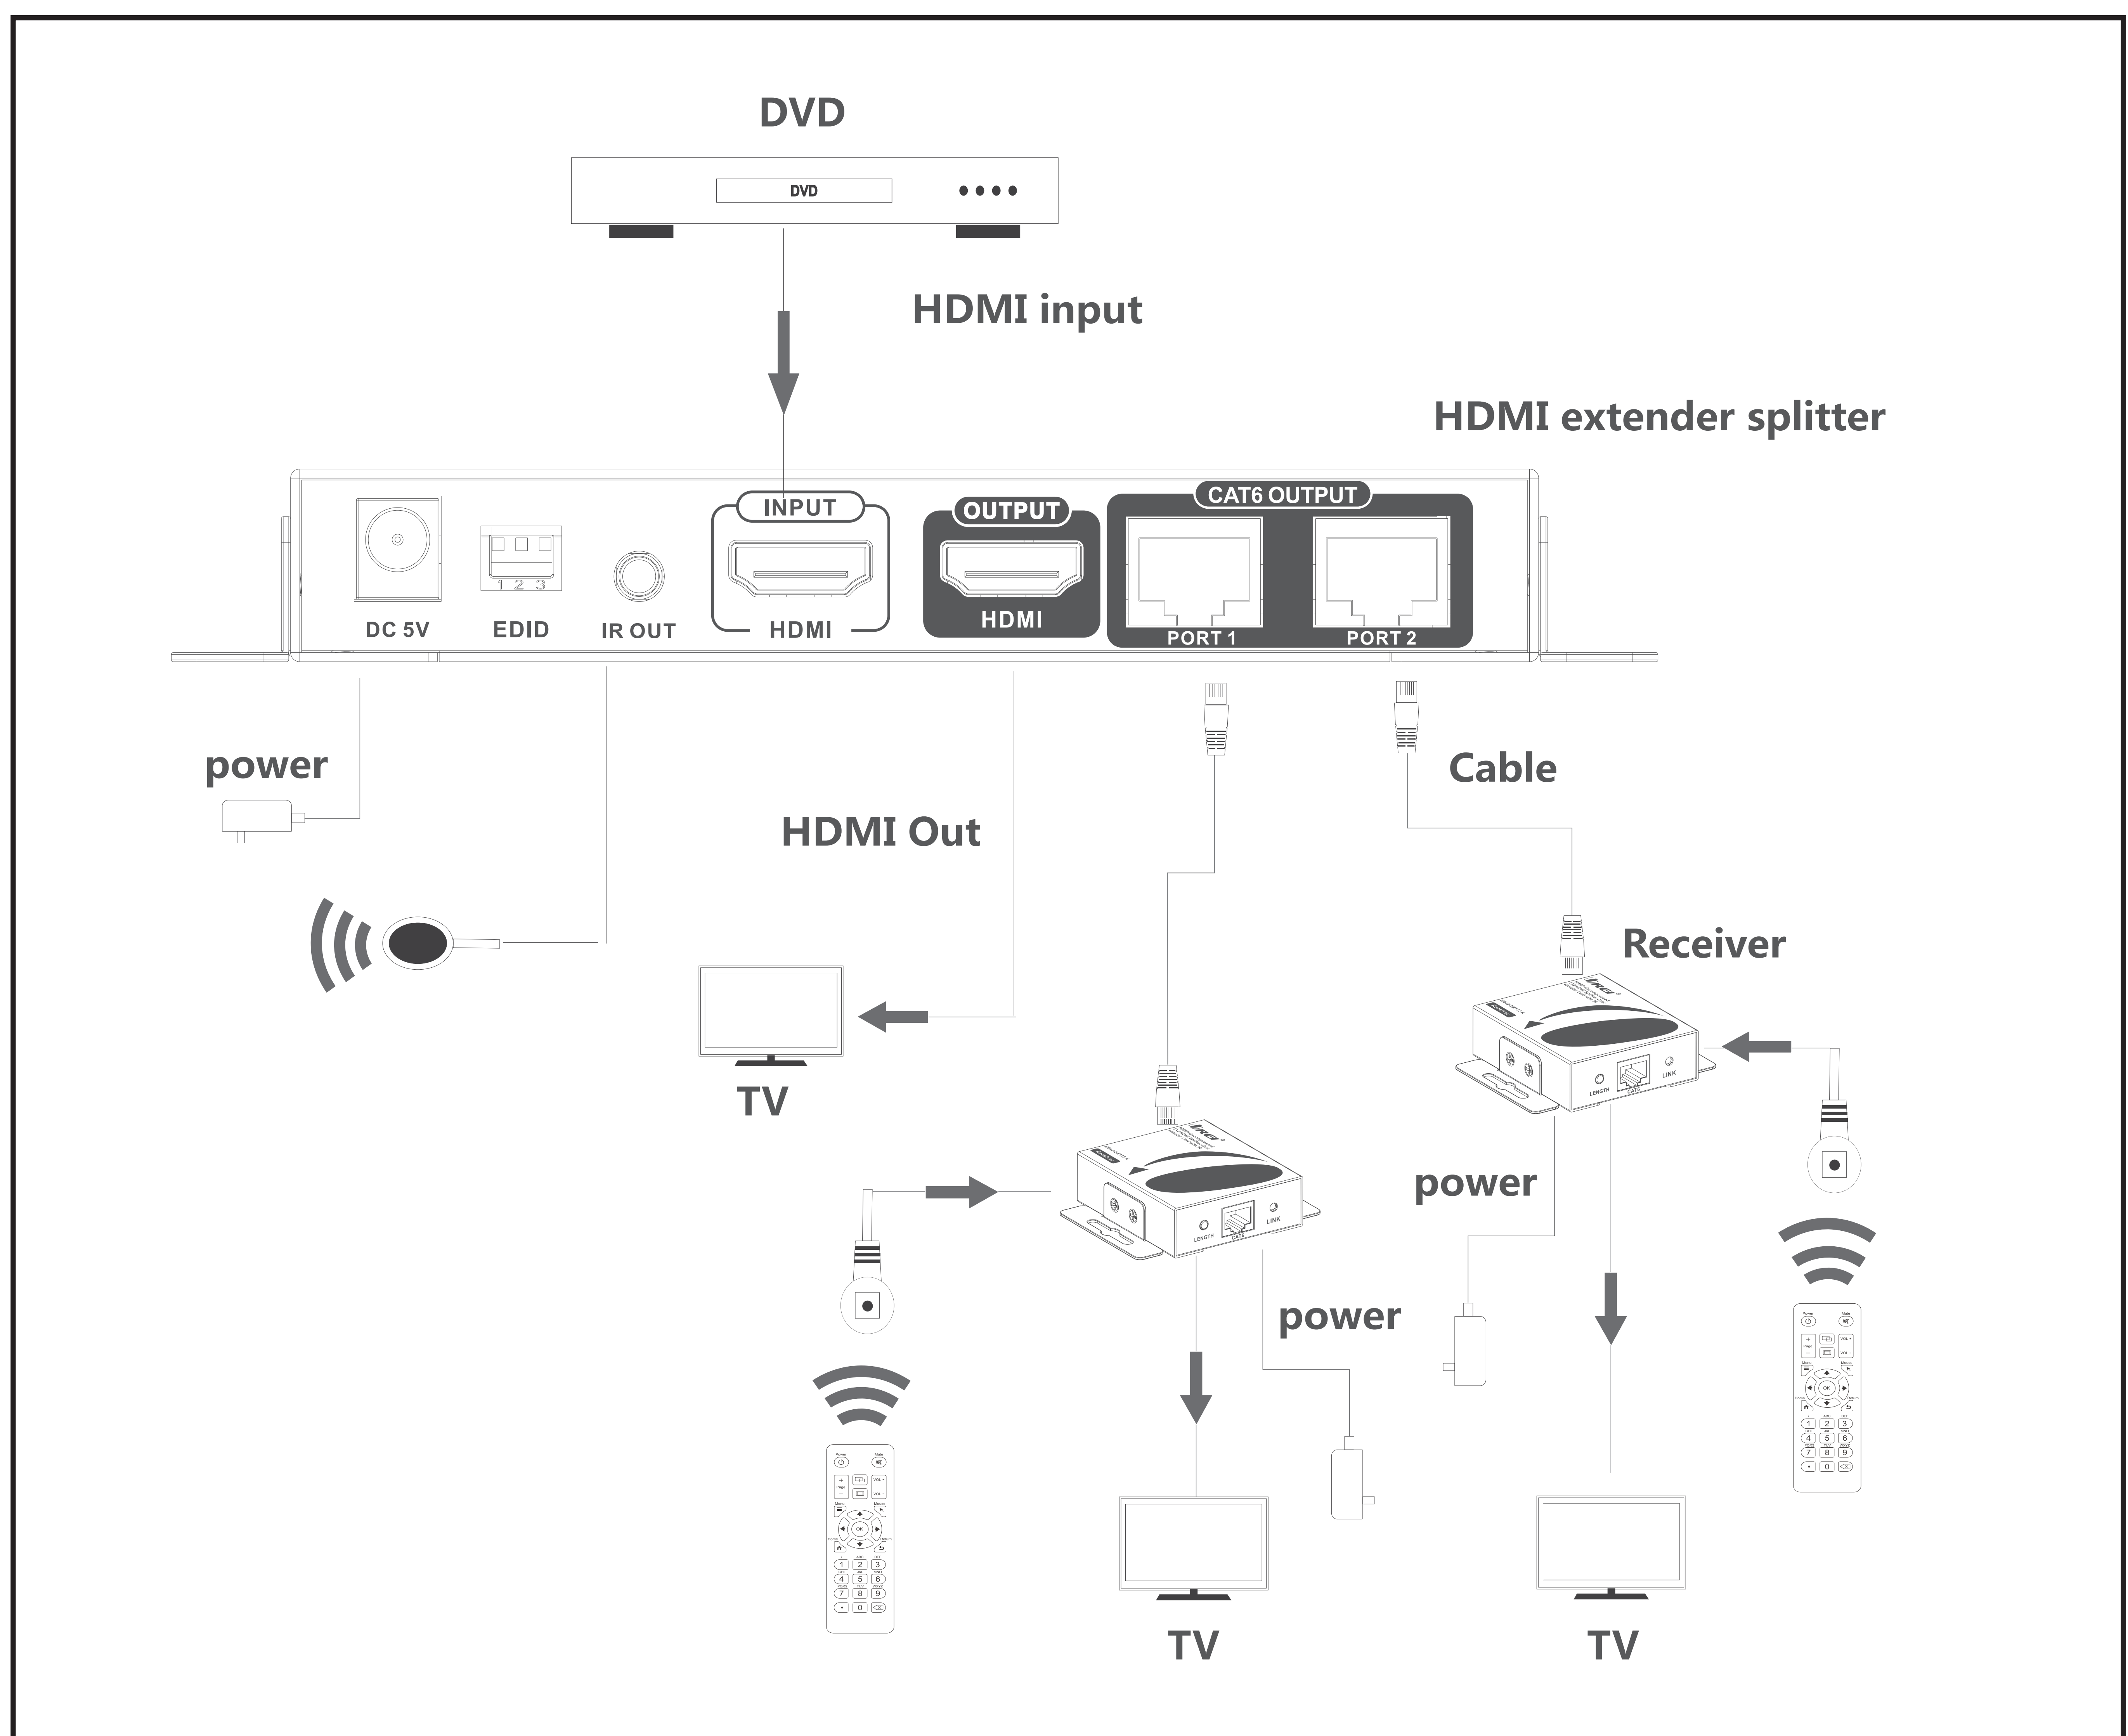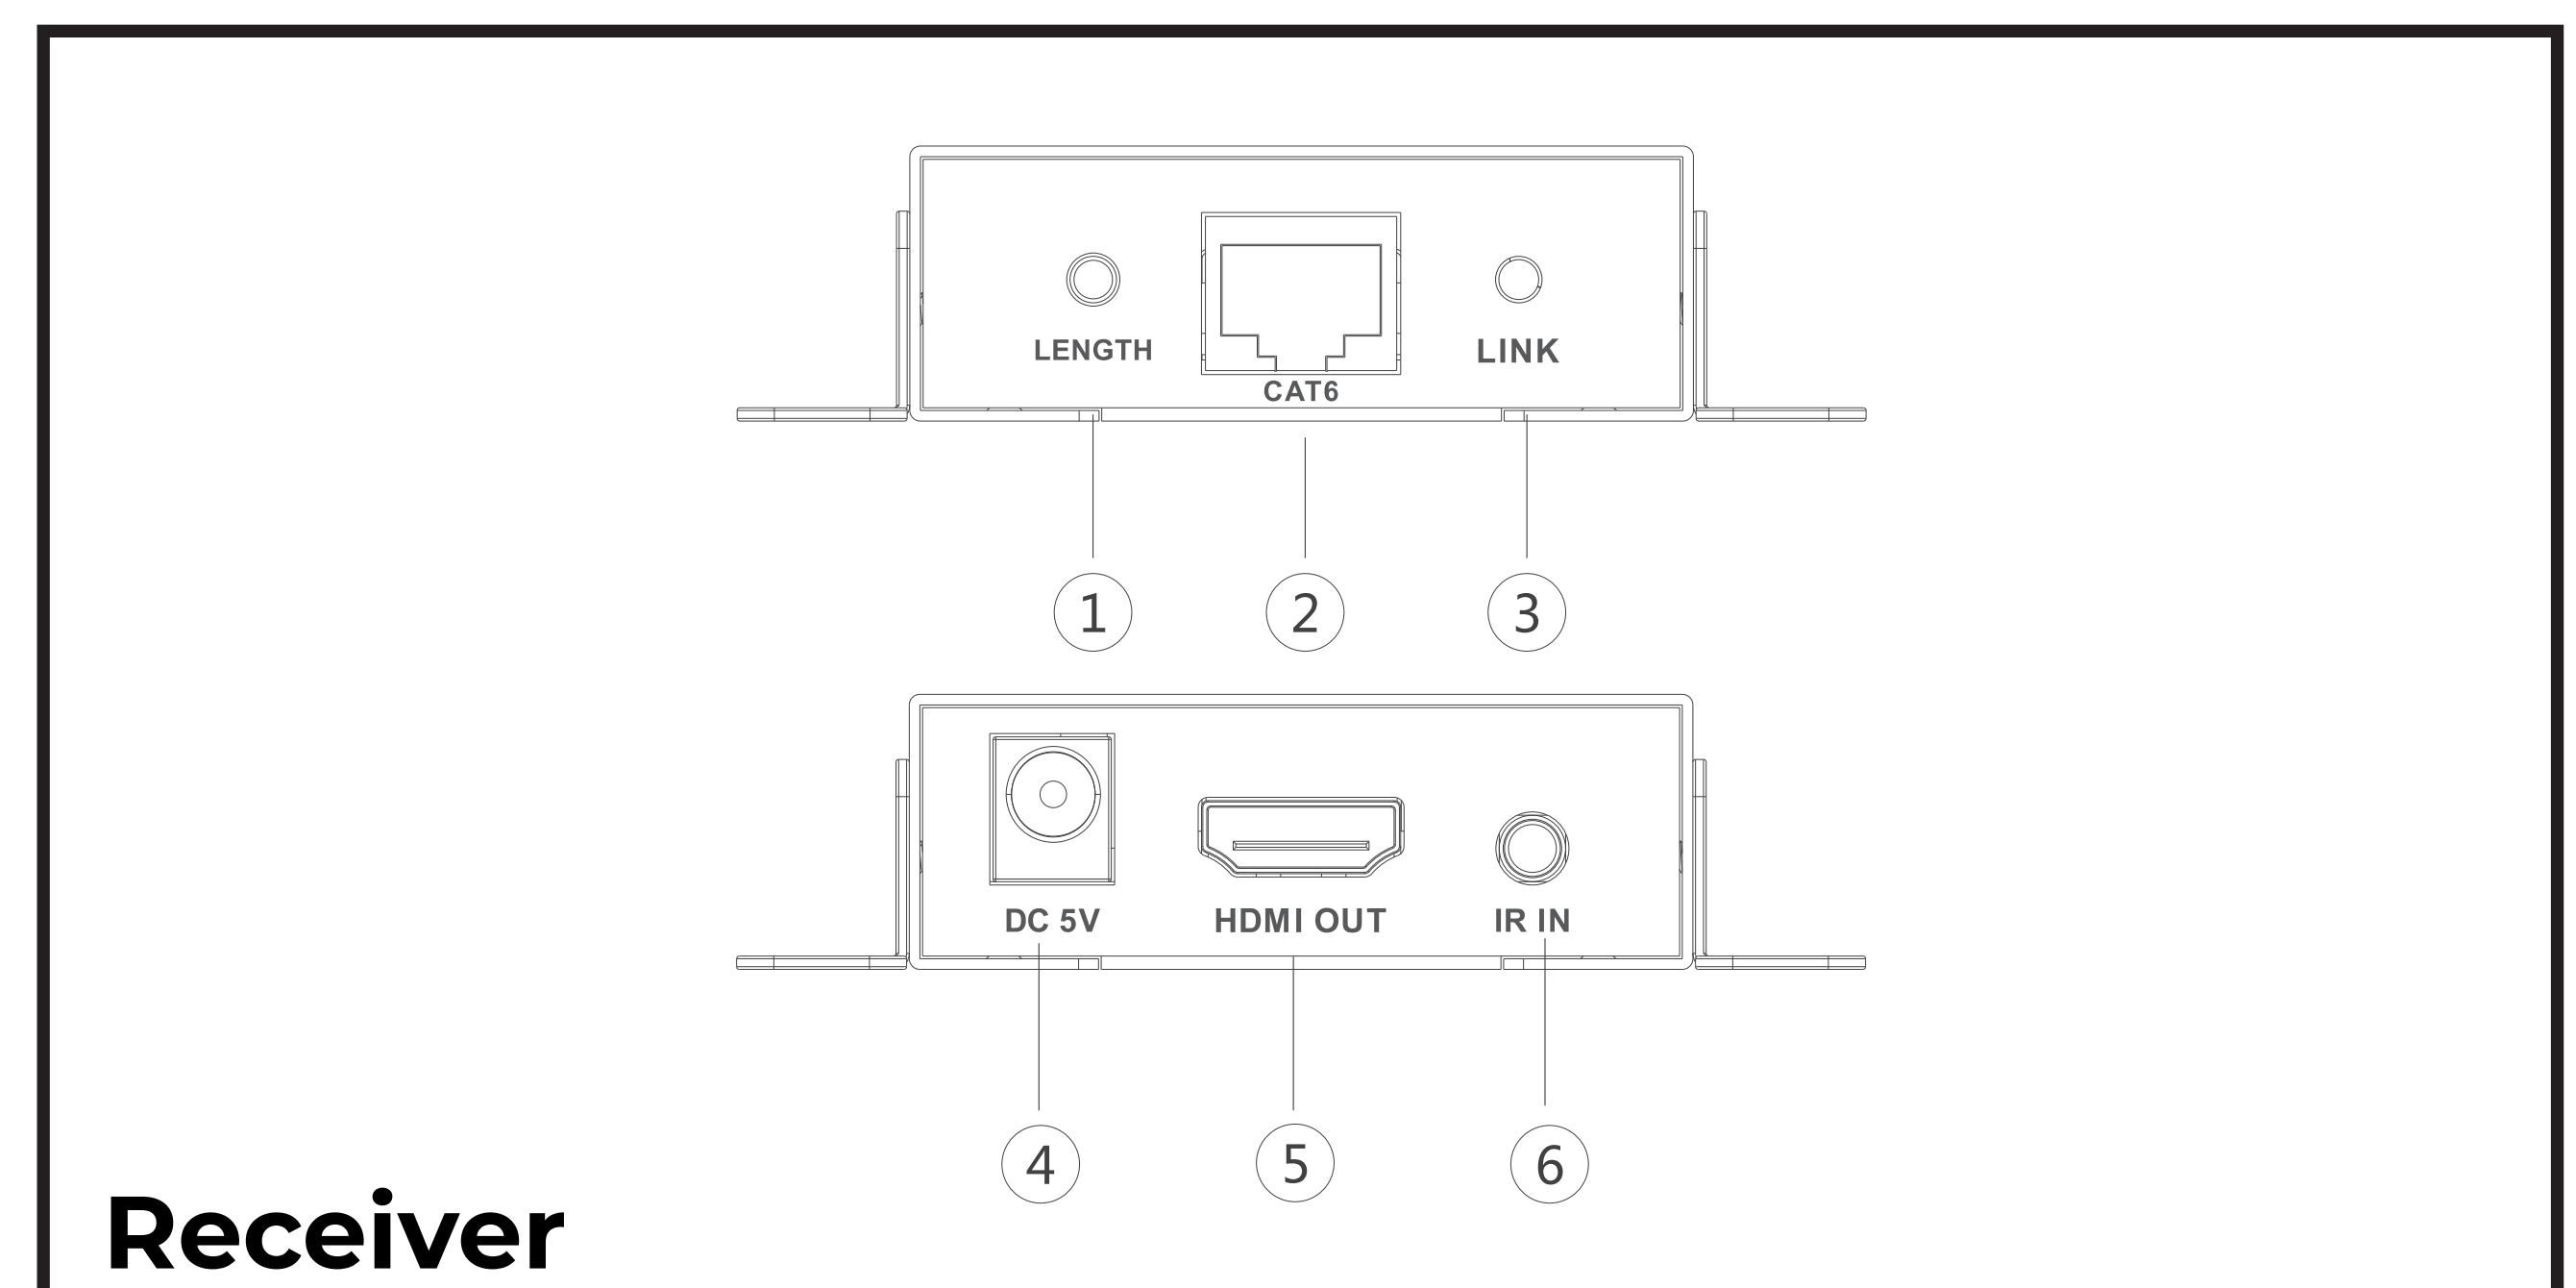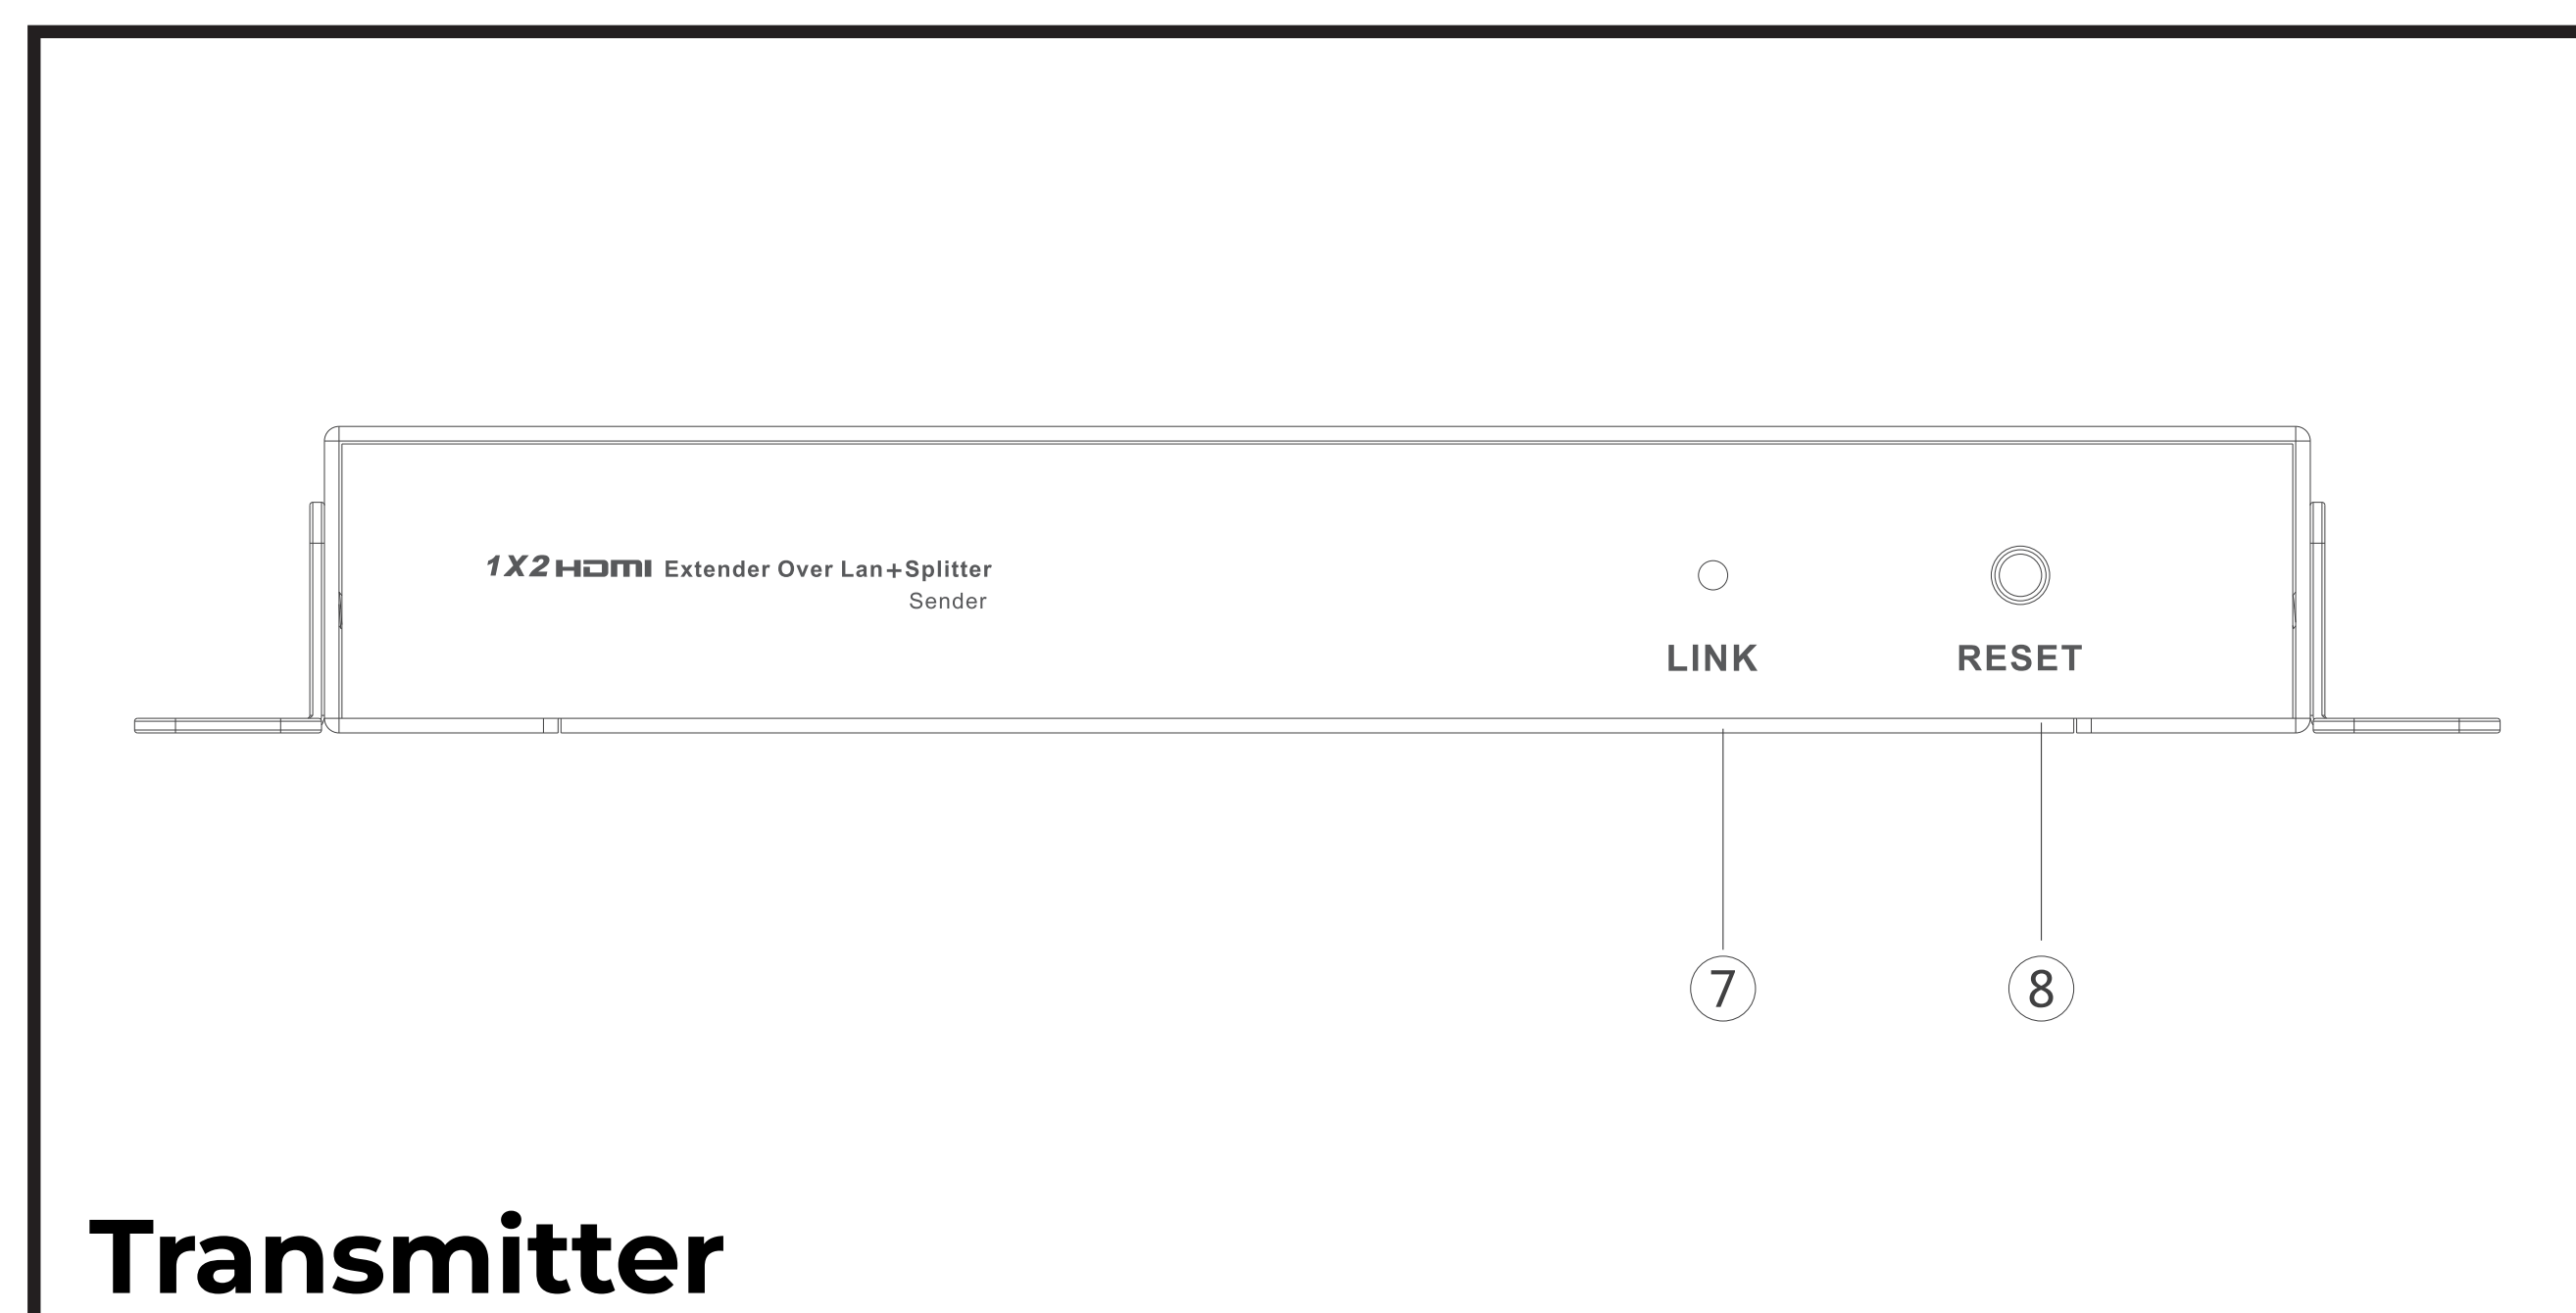

OVER 10 YEARS
EXPERIENCE

