



Network

PTZ

QNP-6320HS

2MP H.265 Stainless 32x PTZ Camera



Key Features

- Maximum 2MP (1920 x 1080) resolution
- 4.44 ~ 142.6 (32x) optical zoom
- H.265, H.264, MJPEG codec support, Multiple streaming
- WiseStreamII, Day & Night (ICR), WDR(120dB)
- Directional detection, Tampering, Motion detection
- Audio detection, Digital auto tracking
- Micro SD/SDHC/SDXC 1slot 256GB
- IP66/IP67, IK10, NEMA4X, PoE, Material: SUS316L

QNP-6320HS

2MP H.265 Stainless 32x PTZ Camera



Specifications

Video

Imaging Device	Size	1/2.8"
	Type	CMOS
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	
Max. Framerate	H.265/H.264	60fps/50fps(60Hz/50Hz)
	MJPEG	30fps
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	0.05
	BW(1/30sec, 30IRE)	0.005

Lens

Focal Length (mm)	4.44~142.6	
Zoom Ratio	Optical	32x
	Digital	32x
Max Aperture Ratio (F number)	Wide	1.6
	Tele	4.4
Angular Field of View	Horizontal	64.66°~2.29°
	Vertical	38.08°~1.30°
Min. Object Distance	1.5m(4.92ft)	
Focus Control	Auto, Manual, Oneshot AF, Focus save	
Lens Type	DC auto iris	

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	360° Endless
	Tilt	90°~15°
Pan Speed	Preset	Max. 700°/sec
	Manual	0.024°/sec~200°/sec
Tilt Speed	Preset	Max. 300°/sec
	Manual	0.024°/sec~200°/sec
Sequence	Preset(300ea), Swing, Group(6ea), Trace, Tour, Auto Run, Schedule	
Preset Accuracy	±0.2°	

Operational

Direction Indicator		Support
Day & Night		Auto(ICR)
Backlight Compensation		BLC, HLC, WDR, SSSR
Wide Dynamic Range (dB)		120
Digital Noise Reduction		SSNR V
Digital Image Stabilization		Support(built-in gyro sensor)
Defog		Support
Motion Detection	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	32ea
	Shape	4point Quadrangle zones
	Color / Option	Gray, Green, Red, Blue, Black, White, Mosaic
Gain Control		Off, Max gain, Manual
White Balance		ATW, AWC, Manual, Indoor, Outdoor, Mercury, Sodium
Electronic Shutter	Mode	Minimum, Maximum, Anti flicker
	Speed Range	2~1/12,000sec
Video Rotation		Flip&Mirror
Alarm Interface	Others	Support alarm I/O via optional I/O box
Alarm Triggers		Analytics, Network disconnect, Alarm input
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers.Alarm output, Handover: PTZ preset,send message by HTTP/HTTPS/TCP
Audio In		Support via optional I/O box
Audio Out		Support via optional I/O box
Auto Tracking		Support

Analytics

Analytics Events	Normal	Motion detection, Tampering, Audio detection, Virtual area(Intrusion/Enter/Exit), Virtual line(Crossing, Direction)
------------------	--------	---

Network

Ethernet	Metal shielded RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Smart Codec	Manual, WiseStream II
Bitrate Control	H.265/H.264: CBR or VBR, MJPEG: VBR

Network

Streaming	Unicast	Up to 20 users
	Multicast	Support
	Multiple Streaming	Up to 10 profiles
Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), NTCIP 1205
Application Programming Interface	ONVIF	S, G, T
	Others	SUNAPI(HTTP API), Hanwha Vision Open Platform
Direct Cloud Connection		Optional (needs gateway)

Security

OS / Firmware Protect	Encrypted firmware
User authentication	Digest authentication, Prevent brute-force attack
Network authentication	IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Secure Communication	HTTPS, WSS(WebSocket Secure), SRTP
Access Control	IP-based access control
Data Protect	Encryption credentials, Encrypt compress for live recording file export
Audit	Access / System / Event Log management

General

Memory	RAM	1GB
	Flash	256MB
Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 1slot

Environmental & Electrical

Operating Condition	Temperature	-35°C~+55°C(-31°F~+131°F)
	Humidity	0~95% RH(non-condensing)
	Others	Start up should be done at above -25°C
Storage Condition	Temperature	-50°C~+60°C(-58°F~+140°F)
	Humidity	0~95% RH(non-condensing)
Input Voltage	PoE+(IEEE802.3at, Class4)	
Power Consumption	PoE	Max. 23W, typical 14W

Mechanical

Color	Silver
Material	Stainless(STS316L)
Product Dimensions	Ø227x299.2mm(8.94x11.78")
Product Weight	5,400g(11.93lb)

Certifications & Standards

EMC	FCC 47 CFR 15 Subpart B Class A, CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS-NZS CISPR 32 Class A, IC Regulation ICES-003 Issue 7 Class A
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1
Environment	IEC/EN 63000, IEC 60529 IP66, IEC 60529 IP67, IEC 62262 IK10, NEMA 250 type 4X

DORI (EN62676-4 standard)

Detect (25PPM/ 8PPF)	Wide	60.7m(199.1ft)
	Tele	1921.3m(6303.4ft)
Observe (63PPM/ 19PPF)	Wide	24.3m(79.6ft)
	Tele	768.5m(2521.4ft)
Recognize (125PPM/ 38PPF)	Wide	12.1m(39.8ft)
	Tele	384.3m(1260.7ft)
Identify (250PPM/ 76PPF)	Wide	6.1m(19.9ft)
	Tele	192.1m(630.3ft)


QNP-6320HS

2MP H.265 Stainless 32x PTZ
Camera



CAD

Unit: mm [inch]

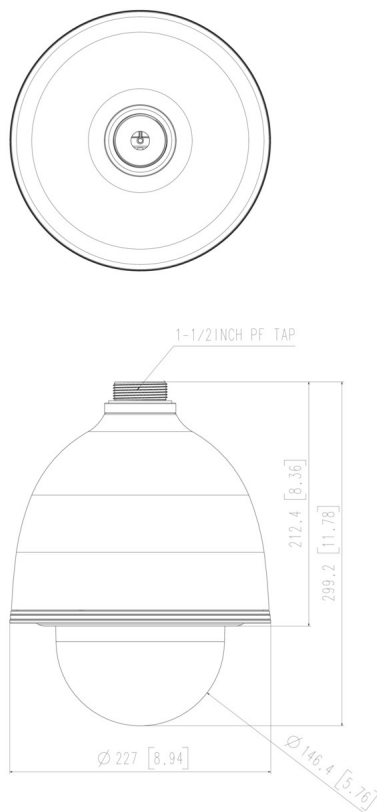

3	MODEL 2	
2	MODEL 1	
1	QNP-6320HS	'21.11.17
No.	MODEL NAME	DATE
Unit:mm[inch]		SCALE:1/1

© Hanwha Techwin Co., Ltd. All rights reserved.

 Hanwha Techwin