



Network

Thermal

TNM-C3620TDR

Bi-Spectrum AI Thermal Camera



Key Features

- Bi-spectrum monitoring with 2MP visible & QVGA thermal
- AI based Object classification with visible channel only (person)
- Remote Temperature Monitoring within -20 ~ 130°C range
- 6 of quadrangle ROI areas for temperature monitoring
- Compact and Light-weight for Indoor purpose

Compatible Devices



SBP-142WMW

TNM-C3620TDR

Bi-Spectrum AI Thermal Camera



Specifications

Video		Thermal	Visible
Imaging Device	Size		1/2.8"
	Type	Uncooled micro bolometer (320x240)	CMOS
Resolution		1280x960, 640x480, 320x240	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264	30fps/25fps(60Hz/50Hz)	
	MJPEG	30fps	
Spectral Range		8~14 μ m	
NETD		\leq 50mK	
Pixel Size		12 μ m	
Min. Illumination (Lux)	Color(1/30sec, 30IRE)		0.05
	BW(1/30sec, 30IRE)		0.005
Video Out		CVBS: 1.0 Vp-p / 75 Ω composite for installation, USB: Micro USB Type B	

Lens

Focal Length (mm)		4.7	4
Max Aperture Ratio (F number)	Wide	1.0	1.6
Angular Field of View	Horizontal	50.0°	87.6°
	Vertical	36.4°	46.4°
	Diagonal	65.3°	104.5°
iFoV		2.553 mRad	
Min. Object Distance		1m(3.28ft)	
Focus Control		Fixed	Fixed

Operational

Day & Night			Auto(ICR)
Backlight Compensation			BLC, HLC, SSDR
Wide Dynamic Range (dB)			150
Digital Noise Reduction			SSNRV

Operational

Digital Image Stabilization		Support(built-in gyro sensor)
Motion Detection	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	24ea
	Shape	Polygonal zones
	Color / Option	Gray, Green, Red, Blue, Black, White, Mosaic
Gain Control		Low, Middle, High
White Balance		ATW, AWC, Manual, Indoor, Outdoor
LDC		Support
Electronic Shutter	Mode	Minimum, Maximum, Anti flicker
	Speed Range	2~1/12,000sec
Video Rotation		Flip, Mirror
Alarm Interface	In/Out	Input 1ea, Output 2ea
Alarm Triggers		Analytics, Network disconnect, Alarm input, MQTT subscription
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers,Alarm output, Handover: PTZ preset, MQTT: publication
Audio In		Selectable(mic in/line in)
Audio Out		Line out
Color Palettes		Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom

Analytics

Classified Object Type		Person, Face
Analytics Events	Based on AI Engine	Object detection
	Normal	Motion detection, Virtual area(Intrusion/Enter/Exit), Virtual line(Crossing, Direction) , Temperature detection Motion detection, Tampering, Audio detection, Virtual area(Lotering, Intrusion, Enter/Exit, Appear/Disappear), Virtual line(Crossing, Direction)

Radiometry

Temperature Detect Range		-20°C~130°C
Temperature Accuracy		±5°C(≤100°C), ±20%(>100°C)
Temperature Detection ROI Zones	Quantity	6ea
	Shape / Option	Quadrangle
Hybrid Palettes		Support
Spot Temperature Reading		Support
ROI Condition Monitoring		Above, Below, Increase, Decrease

Network

Ethernet		Metal shielded RJ-45(10/100BASE-T)
Video Compression		H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression		G.711 u-law /G.726 selectable,G.726(ADPCM) 8kHz,G.711 8kHz, G.726: 16kbps,24kbps,32kbps,40kbps, AAC-LC: 48kbps at 16kHz
Smart Codec		Manual, WiseStream II
Bitrate Control		H.265/H.264: CBR or VBR, MJPEG: VBR
Streaming	Unicast	Up to 20 users
	Multicast	Support
	Multiple Streaming	Up to 6 profiles
Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), MQTT
Application Programming Interface	ONVIF	S, T, M
	Others	SUNAPI(HTTP API)
Direct Cloud Connection		Optional (needs gateway)

Security

OS / Firmware Protect		Encrypted firmware, Secure boot, Signed firmware
User authentication		Digest authentication
Network authentication		IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Secure Communication		HTTPS, WSS(WebSocket Secure), SRTP
Access Control		IP-based access control
Data Protect		Encryption credentials, Encrypt compress for live recording file export
Audit		Access / System / Event Log management
Device ID		Device certificate(Hanwha Vision Root CA)
Secure Storage		HTPM(Hanwha Trusted Platform Module), SDcard partition encrypt(AES-256)
Security Certificate		TPM 2.0 with FIPS 140-2 level2

General

Memory	RAM	4GB
	Flash	512MB
Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 1slot

Environmental & Electrical

Operating Condition	Temperature	-10°C~+55°C(+14°F~+131°F)
	Humidity	0~95% RH(non-condensing)
Storage Condition	Temperature	-30°C~+60°C(-22°F~+140°F)
	Humidity	0~95% RH(non-condensing)

Environmental & Electrical

Input Voltage		PoE+(IEEE802.3at, Class4), 12VDC
Power Consumption	PoE	Max. 17.0W, typical 12.5W
	12VDC	Max. 14.5W, typical 11.0W

Mechanical

Color	White
Material	Aluminum
RAL Code	RAL9003
Product Dimensions	135(W)x75(H)x188.5(D)mm(5.31x2.95x7.42")
Product Weight	1.7kg(3.77lb)

Certifications & Standards

EMC	FCC 47 CFR 15 Subpart B Class A, CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, IC Regulation ICES 003: 2016 ANSI C63.4 2014 Class A
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1
Environment	IEC/EN 63000

DORI (EN62676-4 standard)

Detect (25PPM/ 8PPF)	Wide	80.1m(262.8ft)
Observe (63PPM/ 19PPF)	Wide	32.0m(105.1ft)
Recognize (125PPM/ 38PPF)	Wide	16.0m(52.6ft)
Identify (250PPM/ 76PPF)	Wide	8.0m(26.3ft)


TNM-C3620TDR

Bi-Spectrum AI Thermal Camera



CAD

Unit: mm [inch]

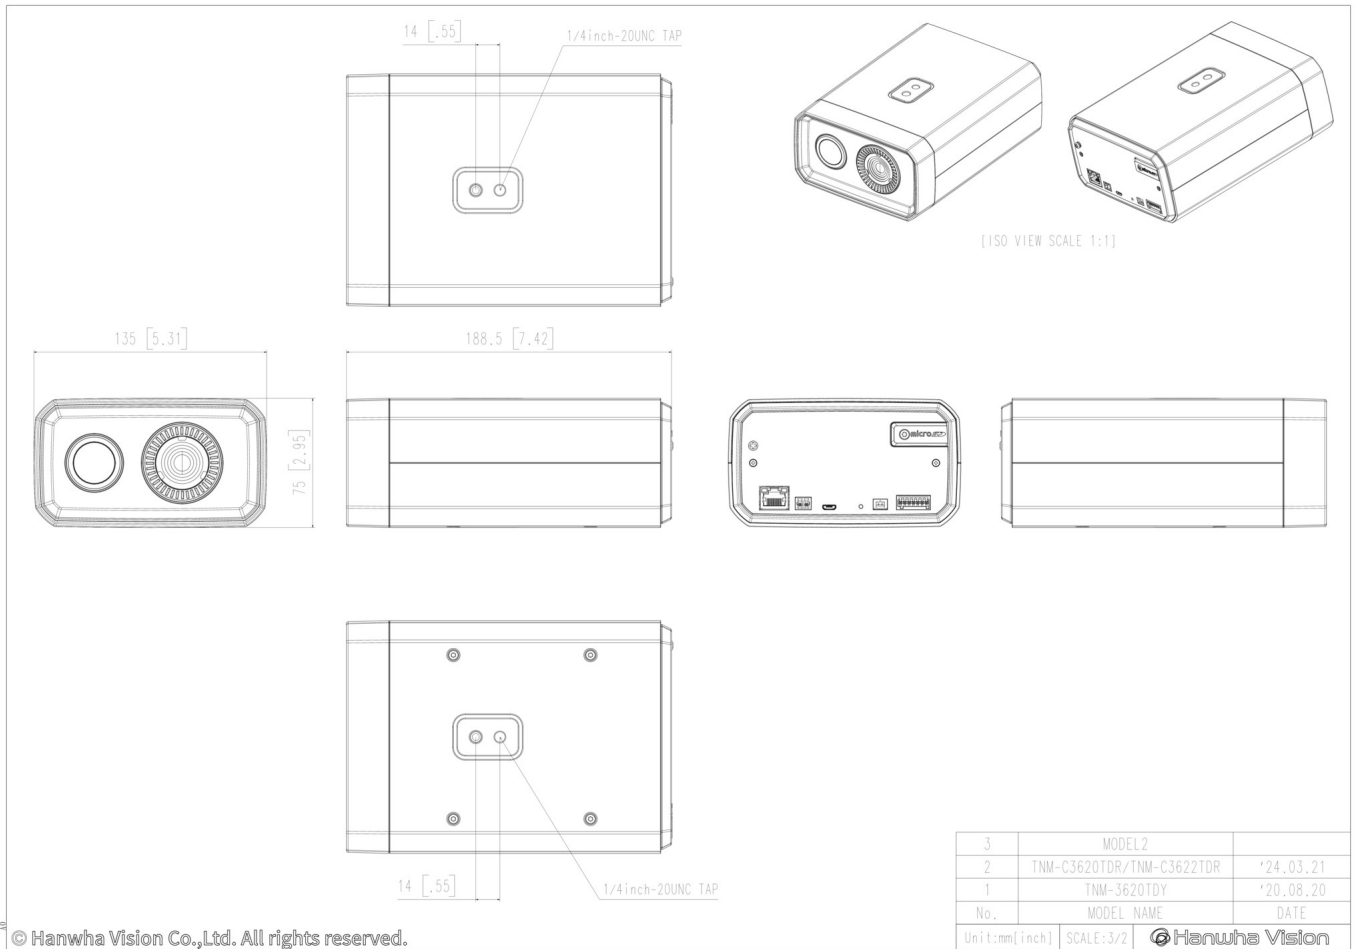

© Hanwha Vision Co.,Ltd. All rights reserved.