





Description

The **VB37M** video balun transceiver is a video transmission device that provides a low cost means of sending live video over unshielded twisted pair, point-to-point wiring for distances up to 750 feet. The VB37M is compatible with all of the “up-the-coax” control systems. A basic system uses (2) VB37 or (2) VB39 units, one at each end of a twisted pair of wires. These units are intended for use over existing in-house telephone wiring, Category wiring or other twisted pair cable runs to provide a convenient, cost-effective alternative to coax. The VB37M is designed to provide superior immunity from noise and interference even when running next to line power!

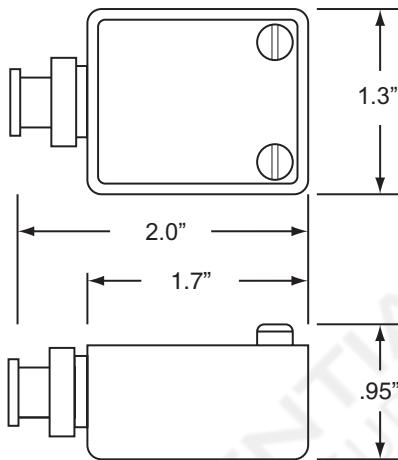

Features

- Quality video over ordinary twisted pair cable
- Immunity to noise and interference
- Passive devices—do not require power
- Video and P/T/Z over a single pair (with “up-the-coax” systems)
- Mounts directly to camera or video source
- Weather resistant design
- Easier to install than coax

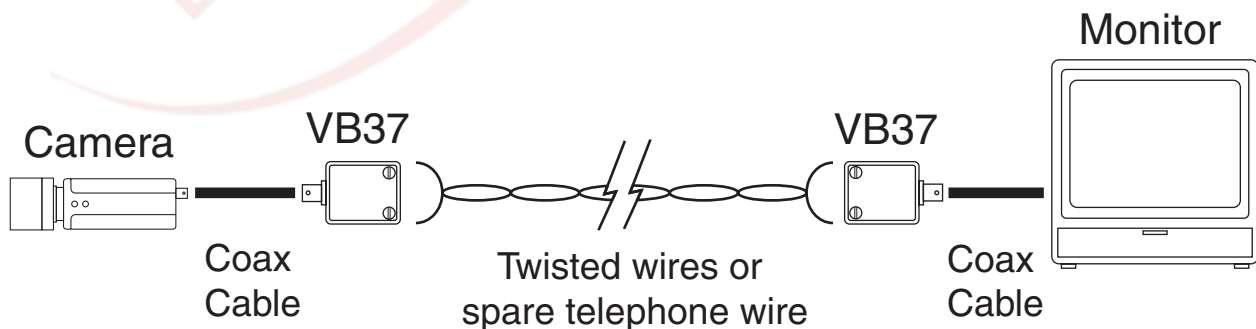

NITEK®

USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

EUROPE

De Schans 19-21 2a
8231 KA Lelystad
Tel: +31(0)320-2300005
Fax: +31(0)320-282186
E-mail: info@nitek.nl
WWW.NITEK.NL

TECHNICAL SPECIFICATION

Transceiver Unit

| | |
|--------|--|
| Size | 1.3" H x 2.0" W x .95" D |
| Input | 1 Vpp composite video Monochrome or Color |
| Output | Balanced low voltage current loop |

System (2 transceivers required)

| | |
|----------------------------|--|
| Video Format | PAL, SECAM, NTSC, RS170, CCIR (Color or B/W) |
| Video Input | 1 Vpp composite video Monochrome or Color |
| Operating Frequency | DC to 10 MHz |
| Common Mode Rejection | >60 dB |
| Wire Size | 26 to 18 AWG twisted pair |
| DC Loop Resistance | 51 Ohms/1,000 ft (max) |
| Nominal Capacitance | 17pF/ft |
| Impedance | 100 Ohms +/- 20% |
| Category Wire | 2 or better |
| Temperature Range | -40°C to +85°C |
| Humidity Range | 0 to 98%, non-condensing |
| Transient Immunity | 6000 V 1,2uS x 50 us Per ANSI / IEE 587 C62.41 B3 3000 A 8us x 20 us when ground screw terminal is connected to earth-ground |
| Enclosure Material | Black, ABC flame retardant plastic |
| Twisted Pair Connection | Screw terminals |
| Shipping Weight | 1 lb |

Wire and Cable Recommendations

We recommend using unshielded twisted pair wiring. The systems will operate over wire 26 to 18 AWG but are optimized for 24 AWG. Category cables may be used. Individually shielded pairs should be avoided, as they drastically reduce the operating range of the systems. Multi-pair cable with an overall shield is acceptable. Video can be operated in the same communication cable coexistent with telephone, computer, control signals, power voltages and other video signals. While video may be routed through telephone punch down block terminals, any bridge-taps, also called T-taps and any resistive, capacitive or inductive devices MUST BE removed from the pair.