



WHD-PRO100-K

Full HD Wireless HDMI extender with Extending distance up to 100 Feet

DIMENSIONS & WEIGHT:

Transmitter:

Length: 85.5mm/3.37in **Width:** 38mm/1.5in
Height: 15.5mm/0.61in **Weight:** 40g/1.14oz

Receiver:

Length: 85mm/3.28in **Width:** 83mm/3.35in
Height: 13.8mm/0.54in **Weight:** 65g/2.29oz

The **WHD-PRO100-K** is a wireless HDMI extender transmitting Full HD HDMI signals up to 100 feet with a line of sight. It is HDMI 1.3a and HDCP 1.3 compliant, supporting video resolutions up to 1080p@60Hz with low latency of 300ms. To set up, connect an HDMI source to the transmitter and power the transmitter via USB, then connect the receiver to a display and power it up using the adapter. Press the pairing button on the receiver, and then on the transmitter to establish the connection. Compact design, easy installation, ideal for commercial and personal setups.

PACKAGE CONTENTS: 1x Transmitter, 1x Receiver, 1x USB Cable, 1x Power Adapter, User Manual

KEY FEATURES:

- The WHD-PRO100 can extend HDMI signals wirelessly.
- Video resolutions up to 1080p@60Hz.
- HDMI 1.3a and HDCP 1.3 compliant
- Signal transmission distances up to 100ft wirelessly (with a line of sight).
- To pair press the pairing button on the receiver and then press it on the transmitter
- After establishing a connection on their own the units will start the HDMI signal transmission
- Compact design with an easy installation.
- Perfect for commercial and personal uses.

SPECIFICATIONS

CONNECTIVITY:

Transmitter:

INPUT:	1 × HDMI [Type A, 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female]

COMPLIANCES:

HDMI Compliance	: HDMI 1.3a
HDCP Compliance	: HDCP 1.4

EXTENDING DISTANCE:

1080P@60Hz:	: 100 Feet (L.O.S)
-------------	--------------------

VIDEO OUTPUT:

Video Resolutions	: Up to 1080p@60Hz
-------------------	--------------------

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

LOOP-OUT/LOCAL PORT:

Has loop out port	: No
Number of Loop out ports	: 0

AUDIO SUPPORT:

HDMI Audio Formats	: PCM2.1/Dolby5.1
--------------------	-------------------




POWER:

Power Consumption	Tx : 4.5W (Max)
	Rx : 3W (Max)
Power Supply:	Input : AC 100-240V 50/60Hz
	Output : DC 5V/1A





CONNECTION DIAGRAM

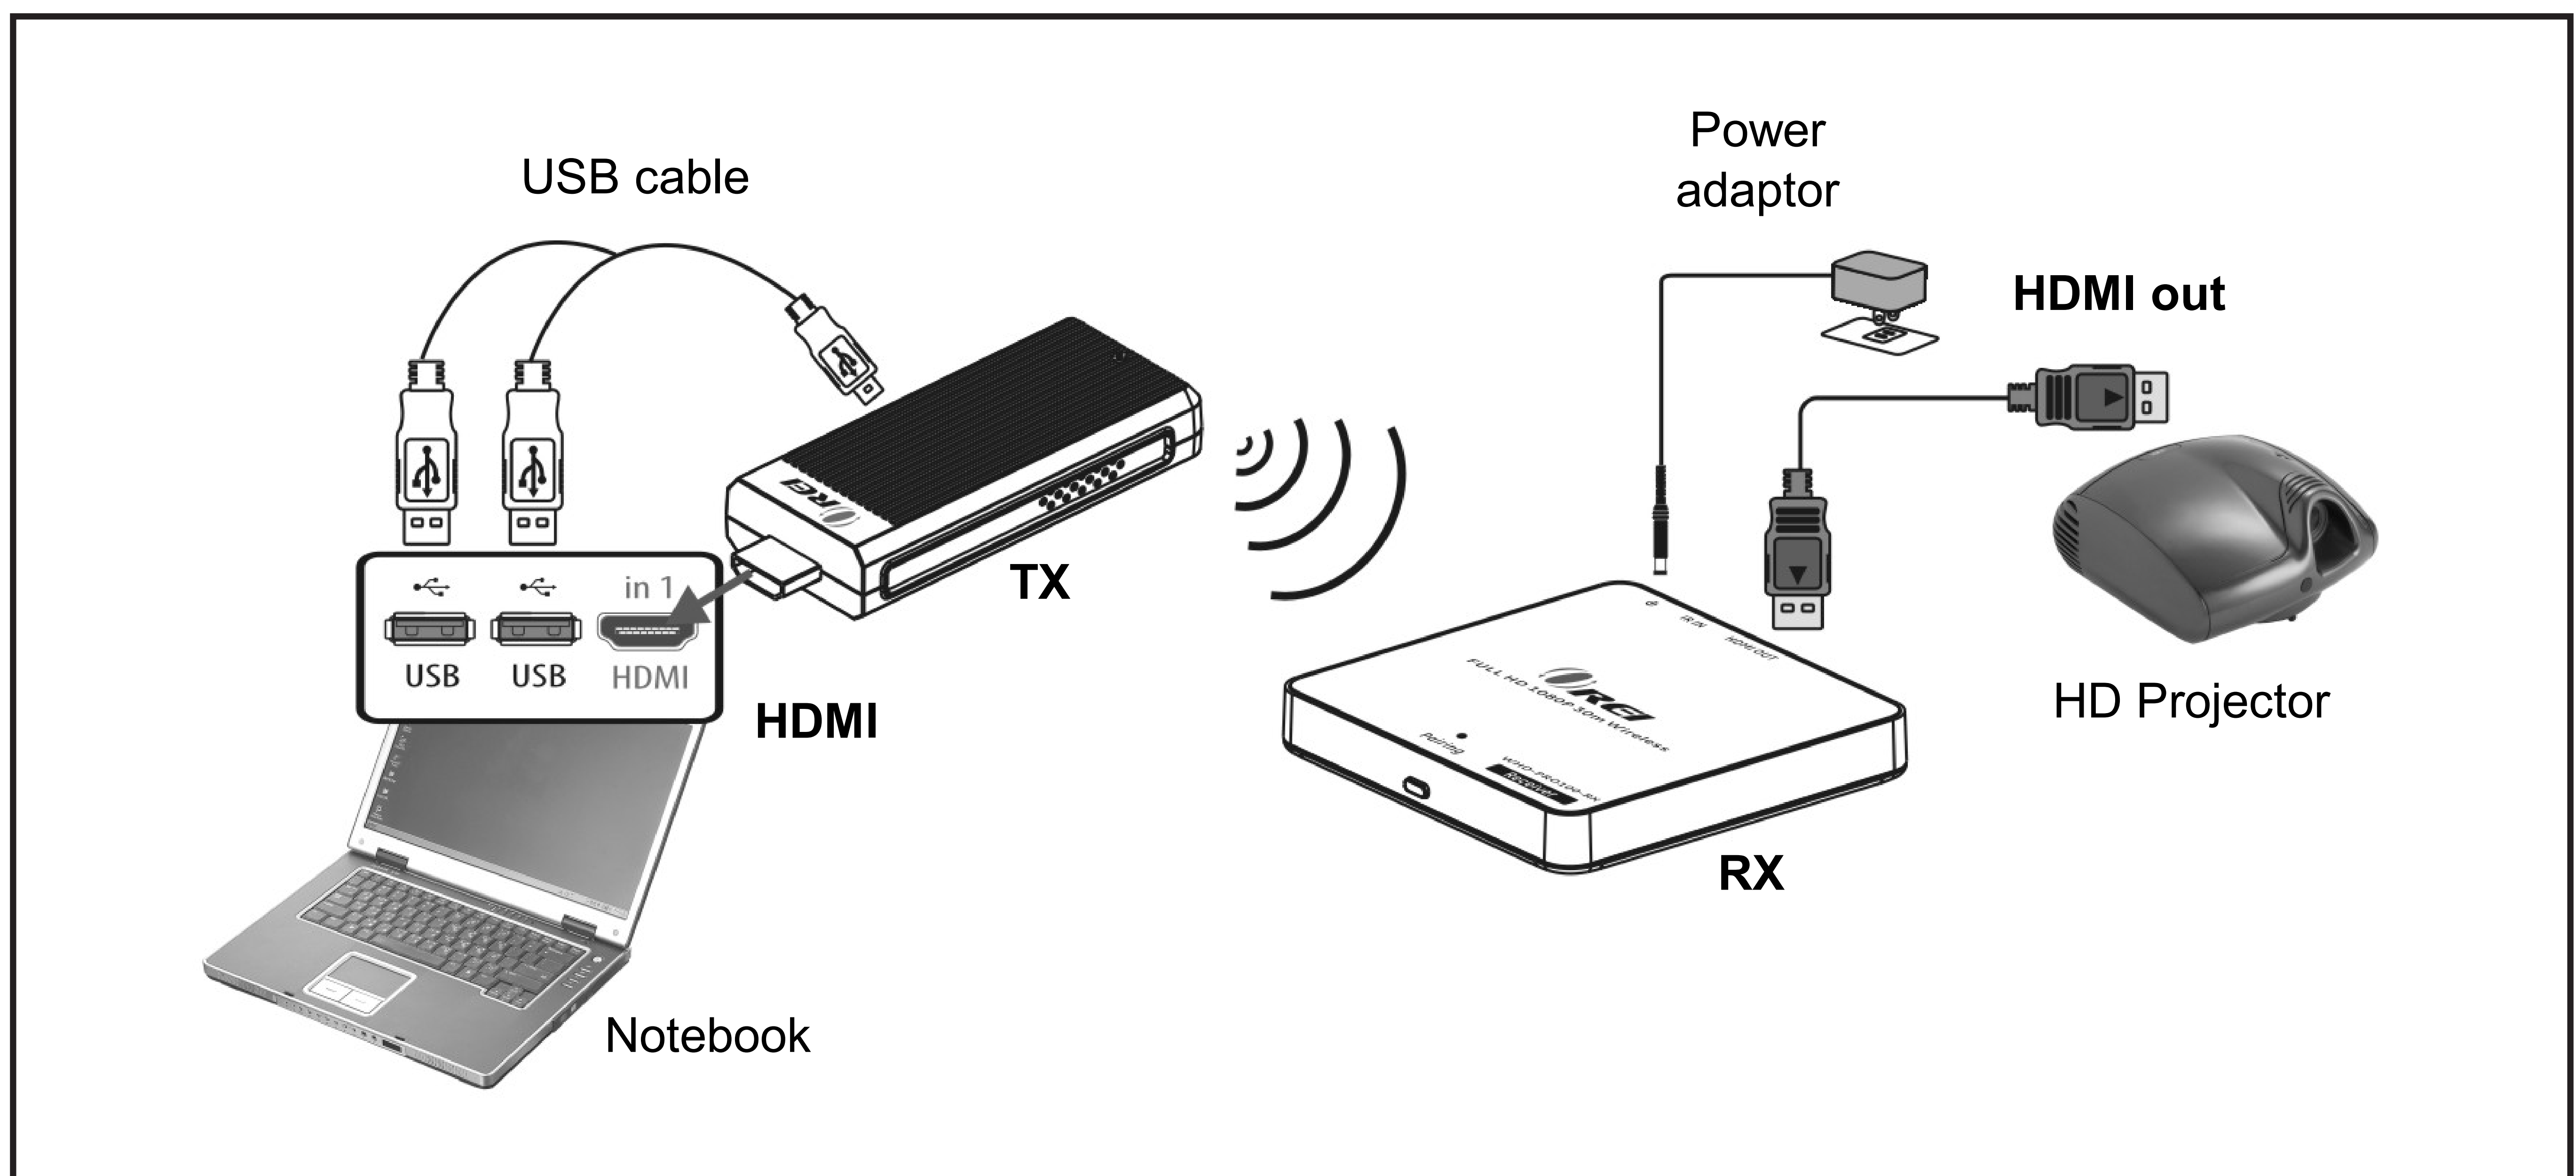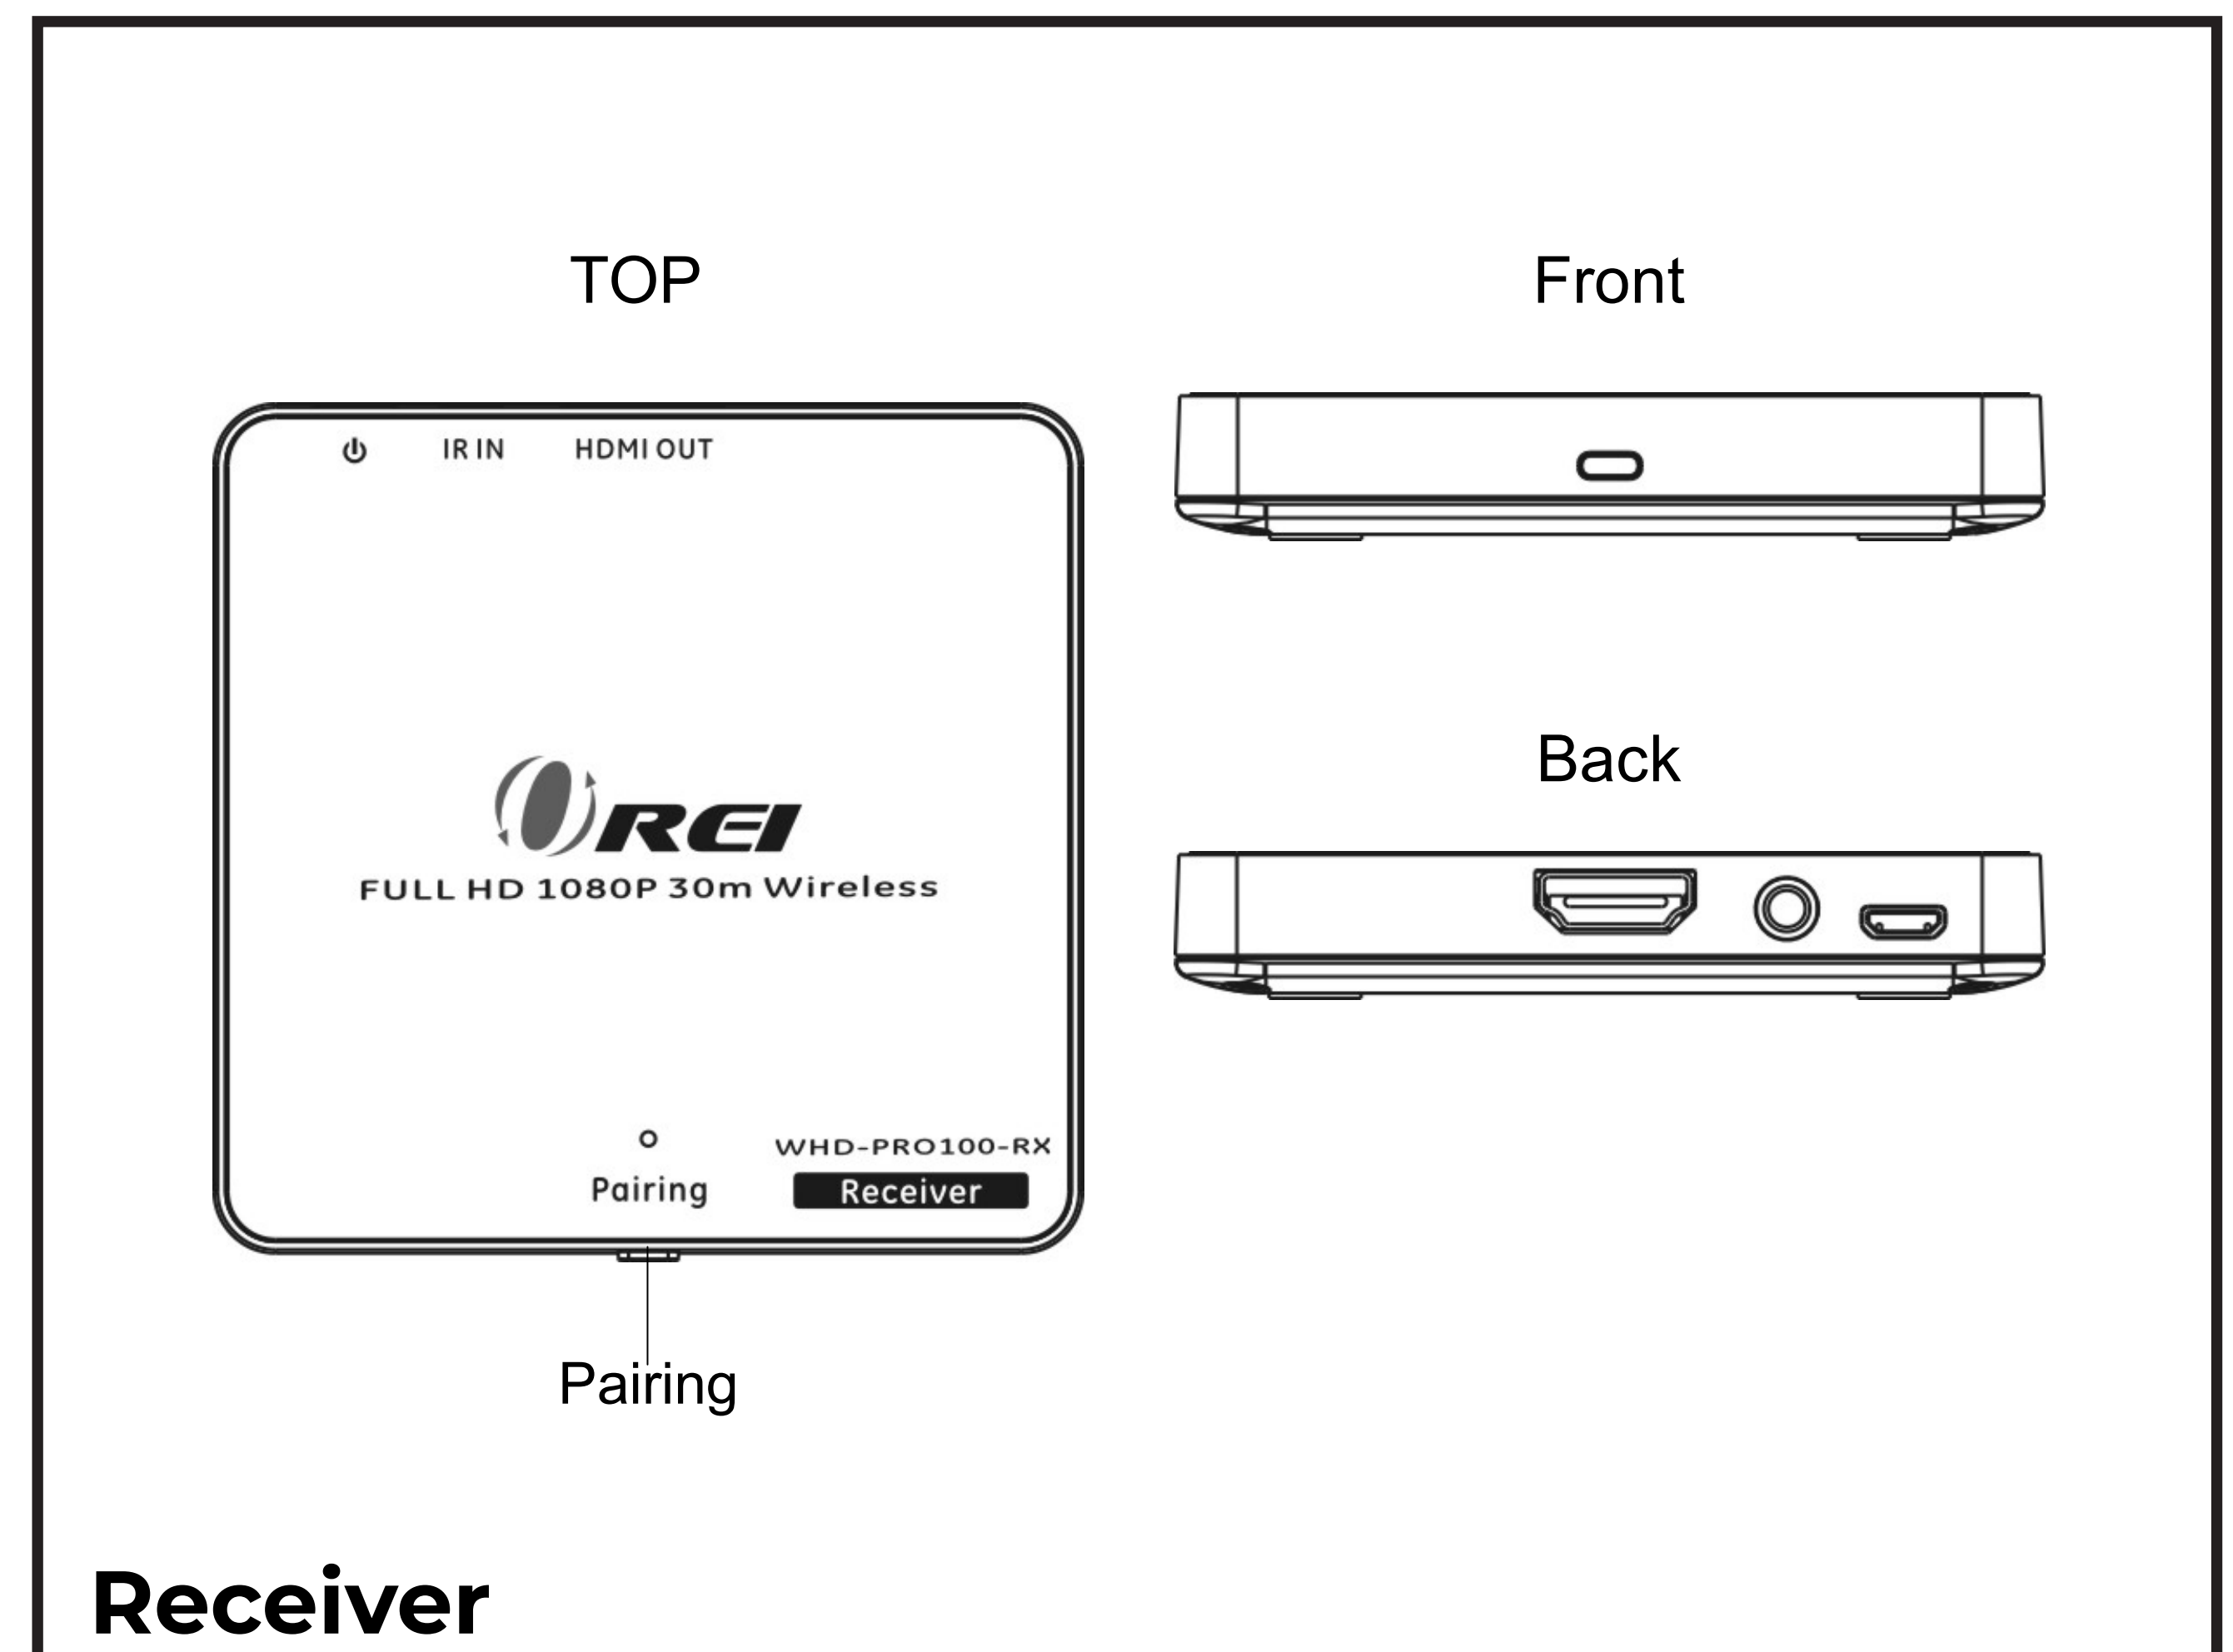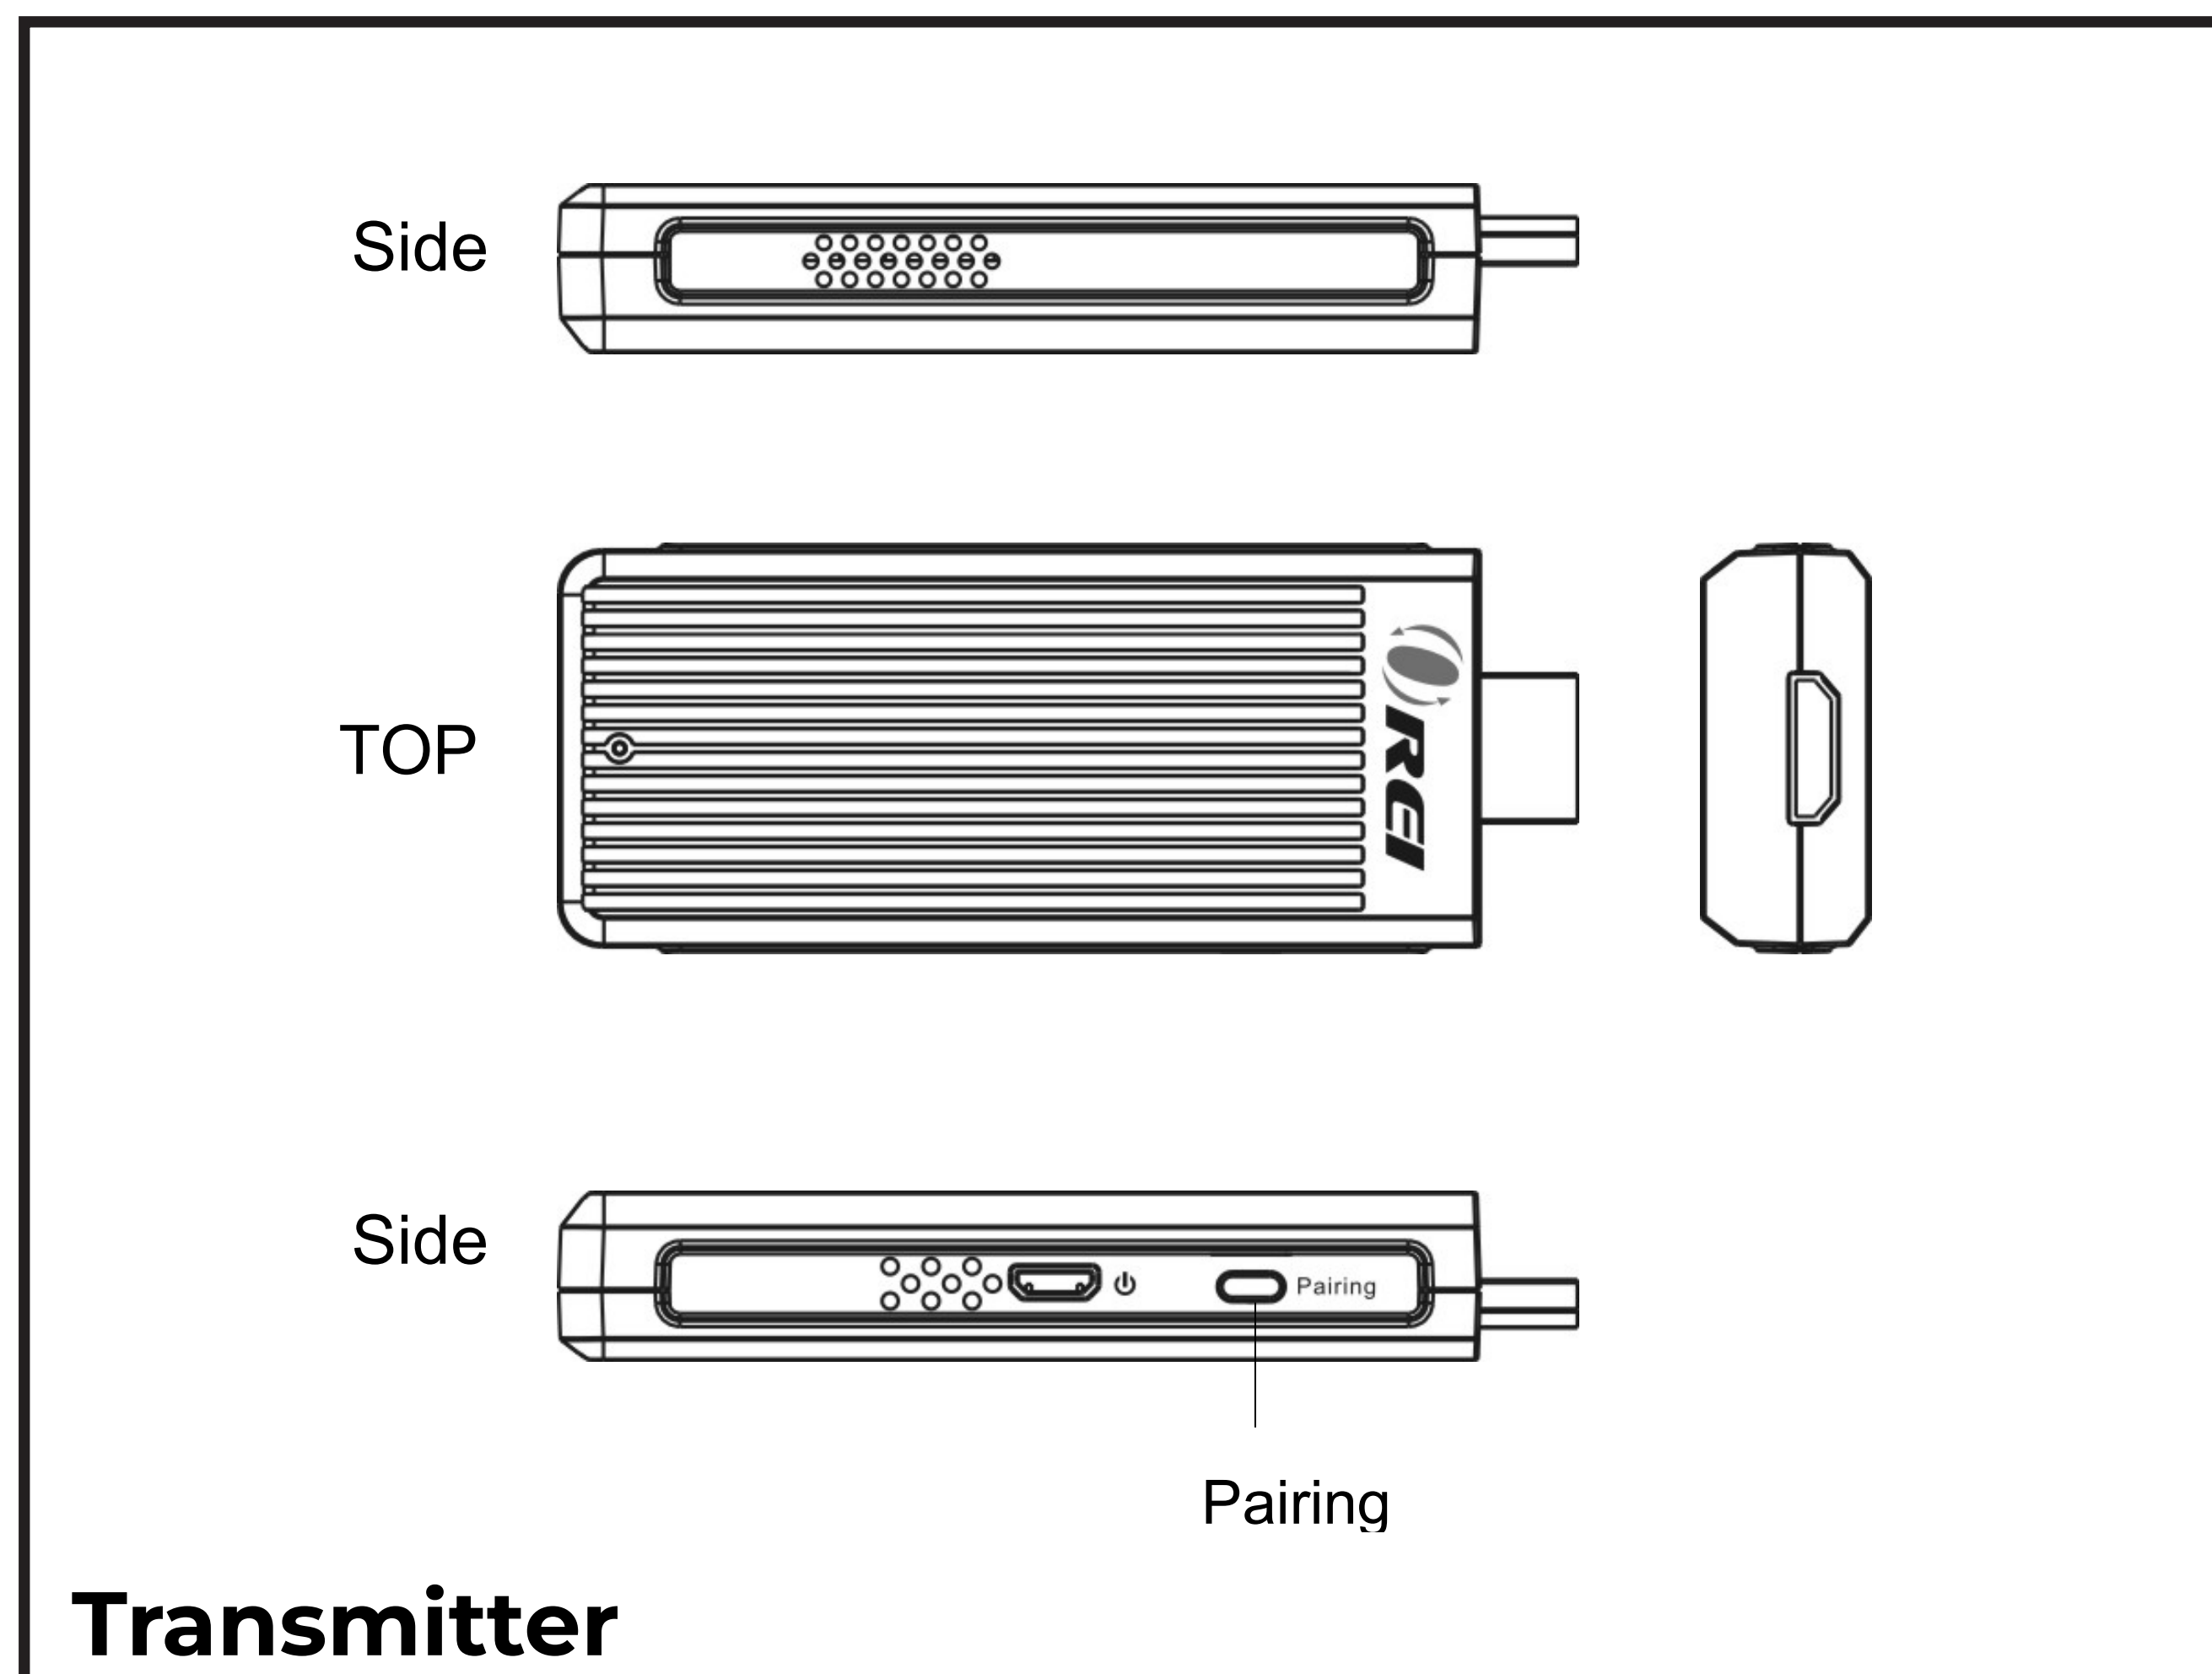

OVER 10 YEARS
EXPERIENCE

